


Overview

HP ProBook 640 G1 Notebook PC

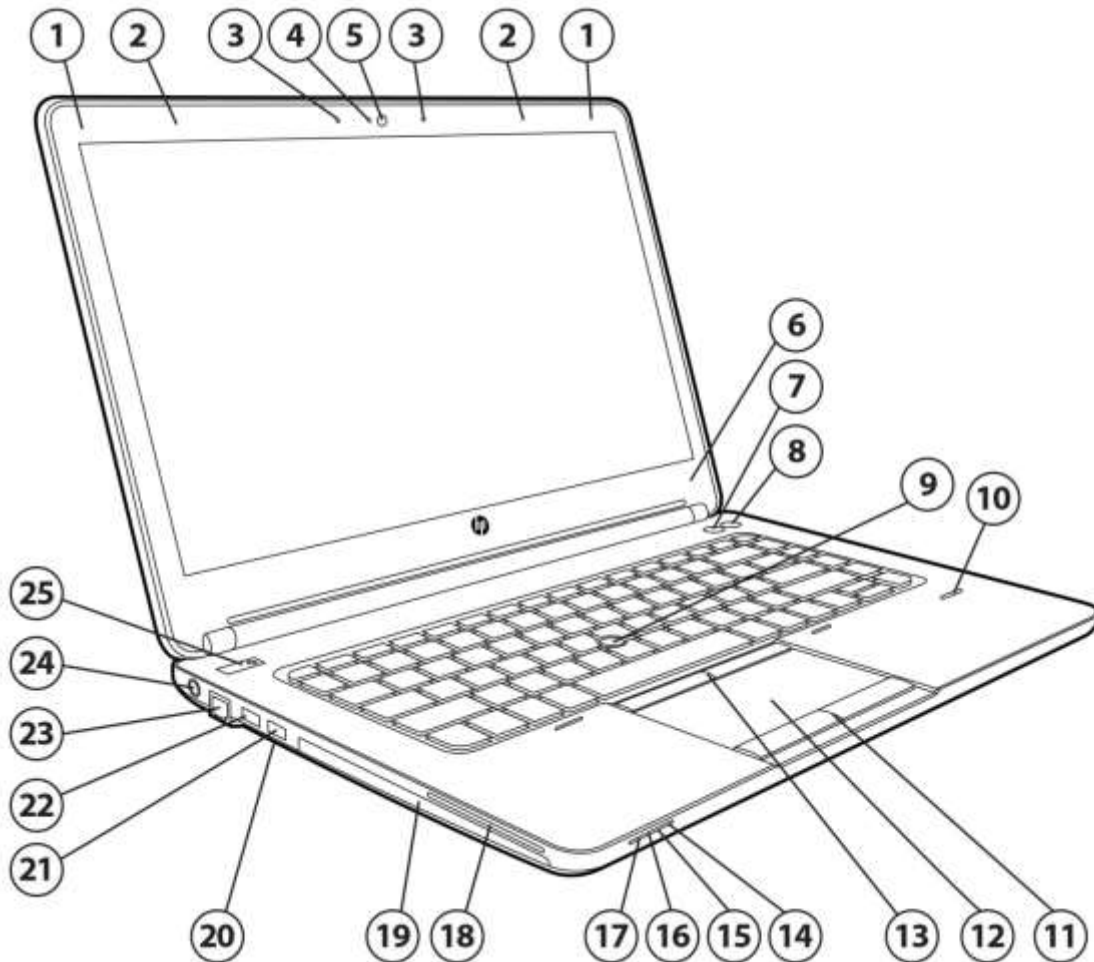

Front/Left


- | | |
|-------------------------------------------------|----------------------------------------|
| 1. WLAN antennas (2)* | 14. Hard drive light |
| 2. WWAN antennas (2)* | 15. AC adapter/Battery light |
| 3. Internal dual-microphone array (2)** | 16. Power light |
| 4. Webcam light (select models only) | 17. Wireless light |
| 5. Webcam (select models only) | 18. Smart Card Reader |
| 6. Internal display switch | 19. Optical Drive (select models only) |
| 7. Wireless button | 20. Media Card Reader |
| 8. Volume mute button | 21. USB 3.0 port (1) |
| 9. Pointing stick (select models only) | 22. USB 3.0 Charging port |
| 10. Fingerprint reader (select models only) | 23. RJ-45 (network) jack/lights |
| 11. Touchpad buttons | 24. Power connector |
| 12. Touchpad zone | 25. Power button |
| 13. Pointing stick buttons (select models only) | |

* The antennas are not visible from the outside of the computer. For optimal transmission, keep the areas immediately around the antennas free from obstructions.

** Models without optional webcam have single integrated microphone on left side of display panel.



Overview

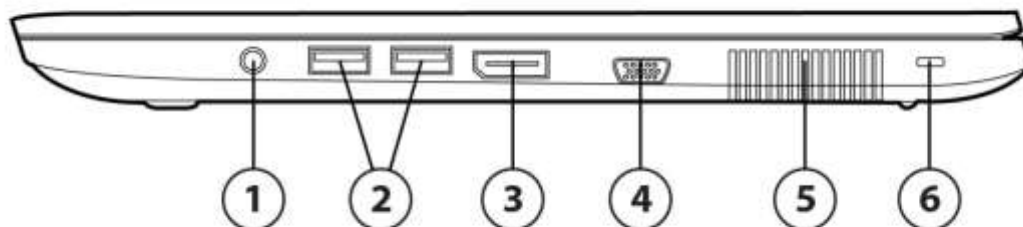


1. Audio-out (headphone) jack/Audio-in (microphone) jack
2. USB 3.0 ports (2)
3. DisplayPort 1.2

Right

4. External VGA monitor port
5. Vents (2)
6. Security cable slot

Overview

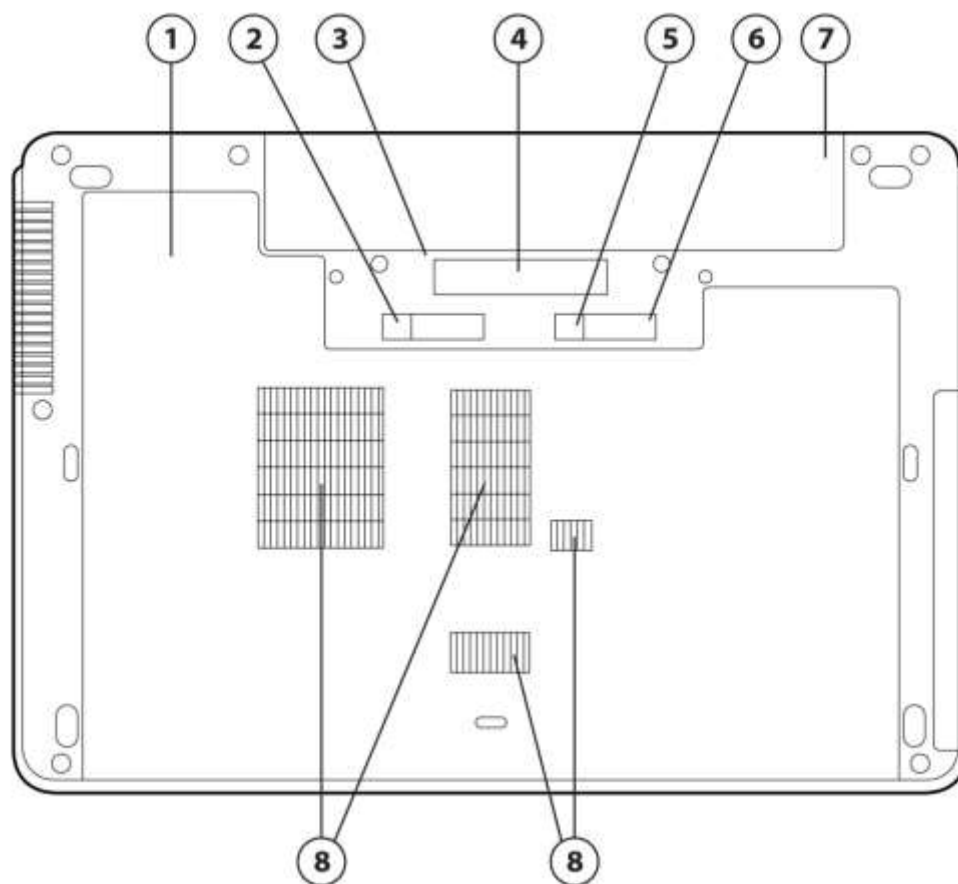


Bottom

- | | |
|----------------------------------------|-------------------------------|
| 1. Service cover | 5. Service cover release lock |
| 2. Battery release latch | 6. Service door release latch |
| 3. SIM card slot- (inside battery bay) | 7. Battery bay |
| 4. Docking connector | 8. Vents |

Overview

HP ProBook 650 G1 Notebook PC

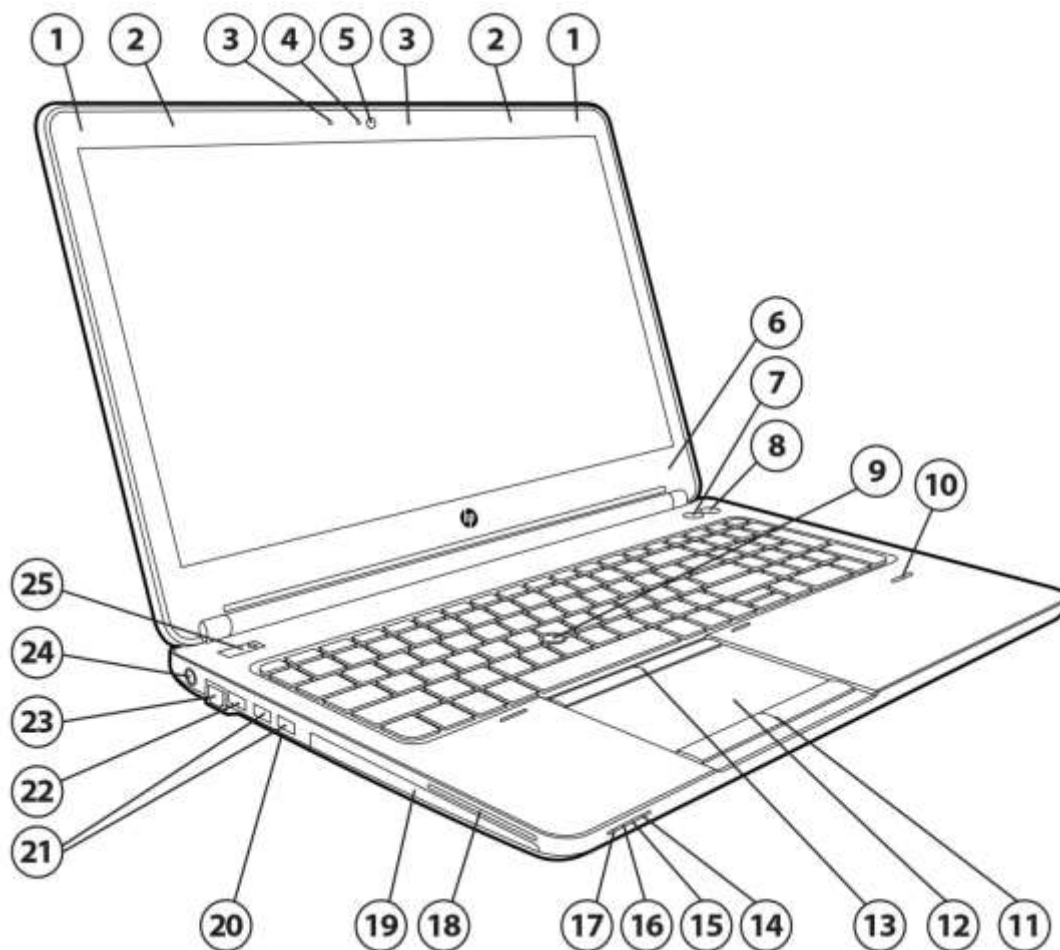

Front/Left


- | | |
|-------------------------------------------------|----------------------------------------|
| 1. WLAN antennas (2)* | 14. Hard drive light |
| 2. WWAN antennas (2)* | 15. AC adapter/Battery light |
| 3. Internal dual-microphone array (2)** | 16. Power light |
| 4. Webcam light (select models only) | 17. Wireless light |
| 5. Webcam (select models only) | 18. Smart Card Reader |
| 6. Internal display switch | 19. Optical Drive (select models only) |
| 7. Wireless button | 20. Media Card Reader |
| 8. Volume mute button | 21. USB 3.0 ports (2) |
| 9. Pointing stick (select models only) | 22. USB 3.0 charging |
| 10. Fingerprint reader (select models only) | 23. RJ-45 (network) jack |
| 11. Touchpad buttons | 24. Power connector |
| 12. Touchpad zone | 25. Power button |
| 13. Pointing stick buttons (select models only) | |

* The antennas are not visible from the outside of the computer. For optimal transmission, keep the areas immediately around the antennas free from obstructions.

** Models without optional webcam have single integrated microphone on left side of display panel.



Overview

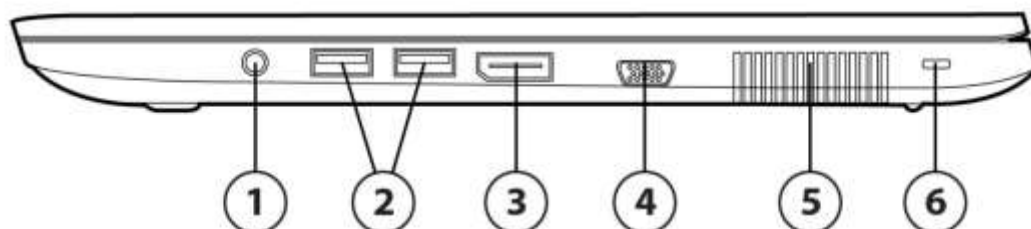


1. Audio-out (headphone) jack/Audio-in (microphone) jack
2. USB 3.0 ports (2)
3. DisplayPort 1.2

Right

4. External VGA monitor port
5. Vents (2)
6. Security cable slot



Overview

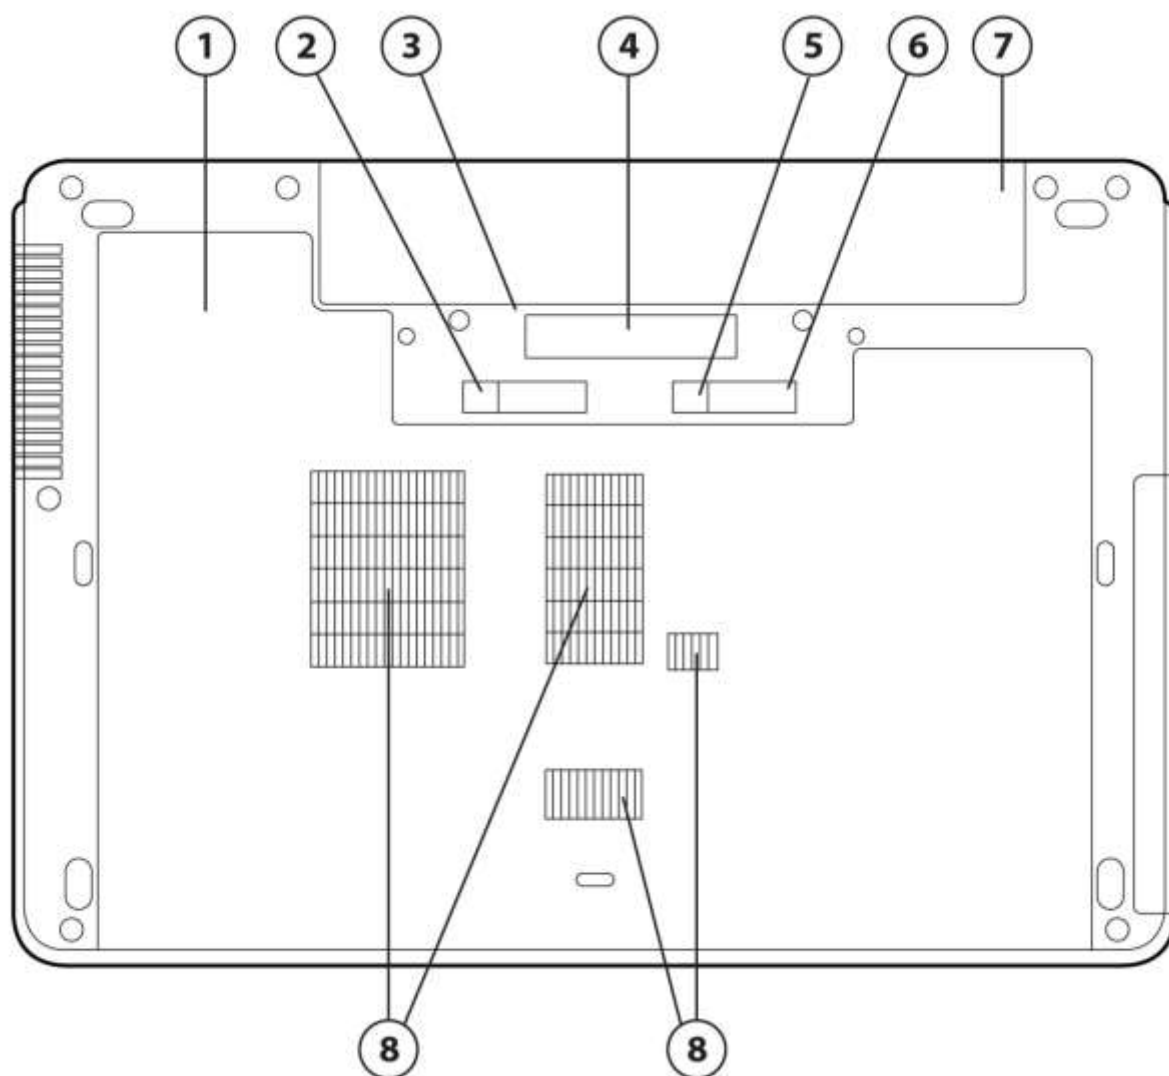


- 1. Service cover
- 2. Battery release latch
- 3. SIM card slot (inside battery bay)
- 4. Docking connector

Bottom

- 5. Service cover release lock
- 6. Service door release latch
- 7. Battery bay
- 8. Vents



Overview

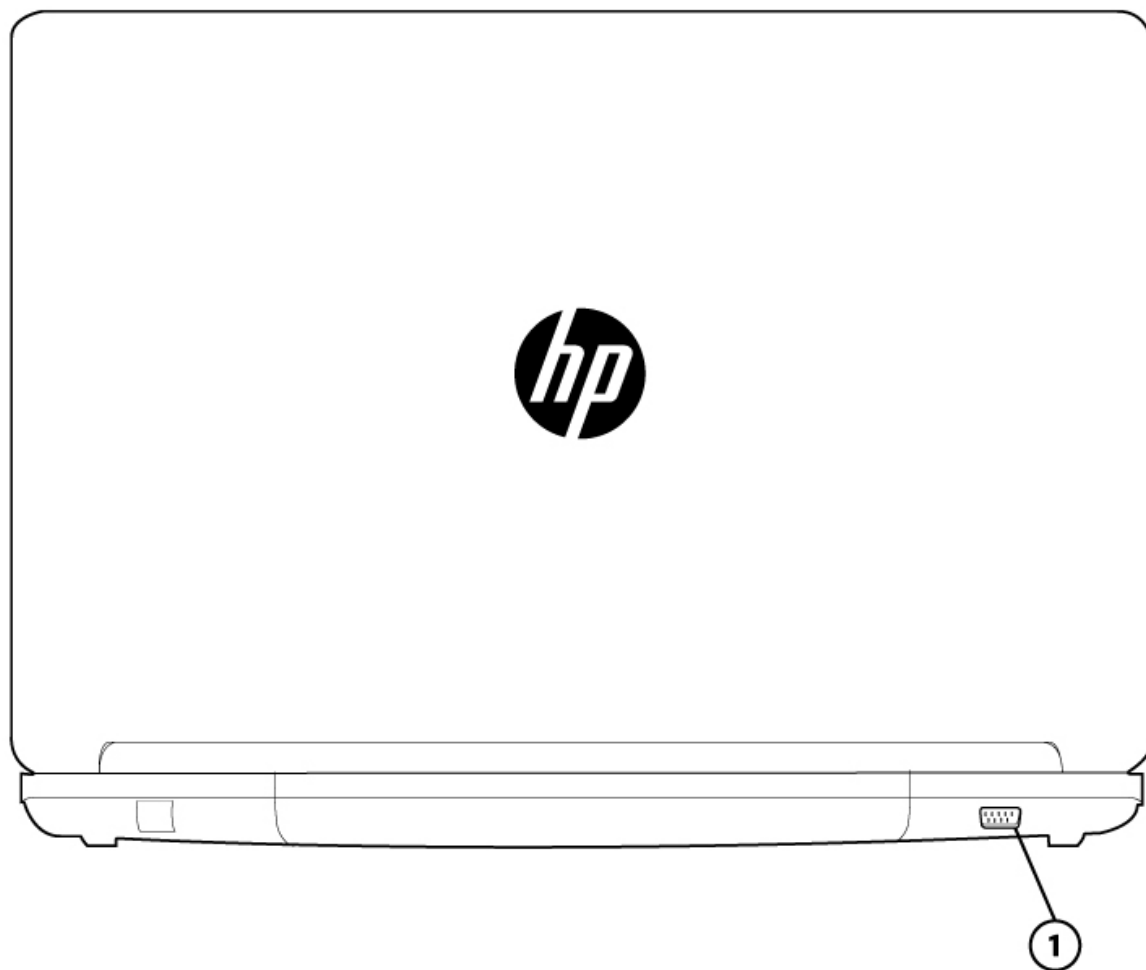

Back

1. Serial port



Overview

AT A GLANCE

- Windows 8 versions, Windows 7 versions, SUSE Linux, or FreeDOS 2.0
 - New thinner and lighter design – PC-ABS (Polycarbonate–Acrylnitrile/Butadiene/Styrene) durable material is nearly 20% thinner than previous generation; soft-touch, more durable 4-step paint process; larger buttons (power), revamped keyboard (arrow keys); latch/hook removal for clean palmrest design; top mounted speakers for optimized audio experience
 - Full-sized spill-resistant keyboard; full separate numeric keypad (HP ProBook 650 only) optional backlit keyboard keeps you productive in low-light settings
 - Choice of 4th generation Intel® Core™ i7, i5 and i3 processors
 - Integrated Intel® HD Graphics 4600 or AMD Radeon™ HD 8750M discrete graphics with 1 GB dedicated GDDR5 video memory
 - Passed military standard Mil-Std-810G* for Drop, Vibration, Functional Shock, Dust, Humidity, Altitude, High Temperature, Low Temperature, Temperature Shock, and ESD, plus an additional 115,000 hours of reliability testing through HP's Total Test Process¹
 - New User Experience Software: HP ePrint, HP Wireless Hotspot (Win 8 only), HP PageLift, HP Mobile Connect (EMEA only)
 - Enhanced security features including HP Client Security, optional HP Fingerprint Reader
 - LED-backlit display
 - HP ProBook 640: 14.0-inch diagonal HD, HD+, FHD
 - HP ProBook 650: 15.6-inch diagonal HD or FHD
 - Optional HD webcam with dual-microphone array for video conferencing
 - DisplayPort 1.2 now native with integrated graphics
 - Four USB 3.0 (640) or Five USB 3.0 (650) ports for fast data transfer from devices (1 charging)
 - HD Audio with DTS Sound+ optimized for high fidelity audio
 - Wireless and speaker mute button to conveniently manage the connectivity and speaker.
 - Flexible wireless connectivity options:
 - HP Connection Manager allows full control over wireless connections, including 3G and 4G mobile broadband, Wi-Fi, Ethernet and Bluetooth® (Win 7 only)
 - HP Mobile Connect (EMEA Only) (Win 8 Only)
 - Integrated 4G HP Mobile Broadband Modules
 - Integrated 802.11 b/g/n or a/b/g/n wireless LAN module
 - Integrated 802.11 ac, a/b/g/n or b/g/n with Bluetooth 4.0 combo card (Linux supports Bluetooth 2.1 only)
 - HP Wireless Hotspot (Win 8 Only)
 - Intel WiDi Software
 - Choice of 7200 rpm user-removable hard drive (up to 500 GB) with HP 3D DriveGuard, 5400 rpm user-removable hard drive (up to 1 TB), 500 GB 7200 rpm Self Encrypting Drive, 500 GB 5400 rpm FIPS Self Encrypting Drive, 256 GB SED Solid State Drive, or 128/180 GB Solid State Drive
 - M.2 32GB flash cache for Intel Smart Response Technology
1. MIL STD 810G testing is not intended to demonstrate fitness for U.S. Department of Defense contract requirements or for military use. Test results are not a guarantee of future performance under these test conditions.

NOTE: See important legal disclosures for all listed specs in their respective features sections.



Features

PRODUCT NAME

HP ProBook 640 G1 Notebook PC

HP ProBook 650 G1 Notebook PC

OPERATING SYSTEM

Preinstalled

Windows 8.1 Pro 64*
Windows 8 64*
Windows 8 Pro 64*
Windows 7 Professional 32 (available through downgrade rights from Windows 8.1 Pro 64)**
Windows 7 Professional 64 (available through downgrade rights from Windows 8.1 Pro 64)**
Windows 7 Professional 32 (available through downgrade rights from Windows 8 Pro 32)**
Windows 7 Professional 64 (available through downgrade rights from Windows 8 Pro 64)**
Windows 7 Professional 32
Windows 7 Professional 64***
SUSE Linux Enterprise Desktop 11
FreeDOS 2.0

Web-only Support

Windows 8.1 Pro 64
Windows 8.1 Enterprise 64
Windows 8.1 Multi-Language 64
Windows 8.1 Emerging Mkts 64
Windows 8.1 Chinese Mkt 64
Windows 8 Enterprise 64
Windows 7 Pro 32
Windows 7 Enterprise 32
Windows 7 Enterprise 64

* Not all features are available in all editions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows functionality. See <http://www.microsoft.com> for details.

** This system is preinstalled with Windows® 7 Pro software and also comes with a license and media for Windows 8.1 or Windows 8 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

*** Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

PROCESSOR

4th Generation Intel® Core™ i7-4712MQ with Intel HD Graphics 4600 (2.3 GHz, 6 MB cache, 4 cores) – HM87 Chipset

4th Generation Intel® Core™ i7-4610M with Intel HD Graphics 4600 (3.0 GHz, 4 MB cache, 2 cores) *
Up to 3.7 GHz with Intel Turbo Boost Technology – QM87 Chipset

4th Generation Intel® Core™ i7-4600M with Intel HD Graphics 4600 (2.9 GHz, 4 MB cache, 2 cores)*
Up to 3.6 GHz with Intel Turbo Boost Technology – QM87 Chipset

4th Generation Intel® Core™ i5-4330M with Intel HD Graphics 4600 (2.8 GHz, 3 MB cache, 2 cores)*
Up to 3.5 GHz with Intel Turbo Boost Technology – QM87 Chipset

4th Generation Intel® Core™ i5-4310M with Intel HD Graphics 4600 (2.7 GHz, 3 MB cache, 2 core)*



Features

Up to 3.4 GHz with Intel Turbo Boost Technology – QM87 Chipset
4th Generation Intel® Core™ i5-4300M with Intel HD Graphics 4600 (2.6 GHz, 3 MB cache, 2 cores)*
Up to 3.3 GHz with Intel Turbo Boost Technology – QM87 Chipset
4th Generation Intel® Core™ i5-4210M with Intel HD Graphics 4600 (2.6 GHz, 3 MB cache, 2 cores)*
Up to 3.2 GHz with Intel Turbo Boost Technology – HM87 Chipset
4th Generation Intel® Core™ i5-4200M with Intel HD Graphics 4600 (2.5 GHz, 3 MB cache, 2 cores)*
Up to 3.1 GHz with Intel Turbo Boost Technology – HM87 Chipset
4th Generation Intel® Core™ i3-4100M with Intel HD Graphics 4600 (2.4 GHz, 3 MB cache, 2 cores)* – HM87 Chipset
4th Generation Intel® Core™ i3-4000M with Intel HD Graphics 4600 (2.5GHz, 3 MB cache, 2 cores)* – HM87 Chipset
4th Generation Intel® Celeron 2950M 2.0 GHz (no turbo boost on Celeron), 2 MB L3 cache, 37W – HM87 Chipset

* Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing on Intel® architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processors will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. Intel's numbering is not a measurement of higher performance.

NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

INTEL TURBO BOOST TECHNOLOGY*

Intel Turbo Boost is a feature that speeds up the CPU for a short time. It is similar to overclocking the processor, except within a framework provided by Intel. This feature provides additional performance and allows the computer to perform certain tasks more quickly. It also draws additional power and generates additional heat. Therefore, if Turbo Boost is used while powered from battery, it causes additional stress on the battery.

Using Turbo Boost while powered from battery might impact battery cycle life. Cycle life describes how long the battery will last before it needs to be replaced. A cycle refers to one complete charge/discharge cycle of the battery. Because Turbo Boost causes extra stress on the battery, it often shortens the lifetime of the battery.

HP decided not to enable Turbo Boost when powered from battery. This decision was based on the desire to give customers the greatest battery cycle life possible. Turbo Boost is enabled when powered from AC adapter.

Based on customer requests, HP will provide an option to enable Turbo Boost while powered from battery. For the 2013 platform, it will be an F10 option. Turbo Boost will be available for devices powered from battery by the end of the year. The additional performance might cause a slight reduction in battery cycle life, but will not void the battery warranty.

*Implementing Turbo Boost in F10 option is only allowed for batteries over 40Whr.

CHIPSET

Mobile Intel® HM87 or QM87

INTEL CORE i5 WITH vPRO/CORE i7 WITH vPRO TECHNOLOGY CAPABLE

Intel Core i5 with vPro and Core i7 with vPro technology is a selectable feature that is available on units configured with select processors, an Intel Centrino® Advanced-N or Ultimate-N WLAN module and a preinstalled Windows operating system. It



Features

provides advances in remote manageability, security, energy efficient performance, and wireless connectivity. Intel Active Management Technology 9.0 (iAMT) offers built-in manageability and proactive security for networked notebook PCs, even when they are powered off* or when the operating system is inoperable. It can help identify threats before they reach the network, isolate infected systems, and update PCs regardless of their power state.

*Requires a Windows operating system, network hardware and software, connection with a power source, and a direct (non-VPN) corporate network connection which is either cable or wireless LAN.

NOTE: Some functionality of this technology, such as Intel® Active management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Intel vPro technology is dependent on 3rd party software providers. Microsoft Windows required. For hard drives, GB = 1 billion bytes. Actual formatted capacity is less. Up to 30 GB for Windows 8 is reserved for system recovery software.

GRAPHICS

Integrated:
Intel® HD* Graphics 4600
Discrete:
AMD Radeon™ HD 8750M**, with 1 GB dedicated DDR5 video memory***

* HD content required to view HD images.
*** AMD Dynamic Switchable Graphics technology requires an Intel processor, plus an AMD Radeon™ discrete graphics configuration and is not available on FreeDOS and Linux OS. With AMD Dynamic Switchable Graphics technology, full enablement of all discrete graphics video and display features may not be supported on all systems (e.g. OpenGL applications will run on the integrated GPU or the APU as the case may be).

DISPLAY

HP ProBook 640

Internal
14" diagonal LED-backlit HD anti-glare SVA flat (1366 x 768)
14" diagonal LED-backlit HD+ anti-glare SVA flat (1600 x 900)
14" diagonal LED-backlit FHD anti-glare UWVA slim (1920 x 1080)

External
Up to 32-bit per pixel color depth
VGA
Port supports resolutions up to 1920 x 1080 external resolution @75 Hz

DisplayPort 1.2
Supports resolutions up to 2560 x 1600, 30-bit color depth at 60 Hz, and full HD (1920 x 1080) monitors, 24-bit color depth at 120 Hz
DVI-D (single link)
Video signal available through DVI port in optional HP Docking Station (sold separately)
supports resolutions up to 1600 x 1200 at both full and reduced blanking, and 1920 x 1200 at reduced blanking

Number of Displays Supported

Number of Displays with HP Advanced Docking Station	UMA	Discrete
-----------------------------------------------------	-----	----------



Features

ProBook 640	3	5
-------------	---	---

NOTE: HD content required to view HD images.

NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

HP ProBook 650

Internal

15.6" diagonal LED-backlit HD anti-glare SVA flat (1366 x768)

15.6" diagonal LED-backlit FHD anti-glare SVA slim (1920 x1080)

External

Up to 32-bit per pixel color depth

VGA

Port supports resolutions up to 1920 x 1080 external resolution @75 Hz

DisplayPort 1.2

Supports resolutions up to 2560 x 1600, 30-bit color depth at 60 Hz, and full HD (1920 x 1080) monitors, 24-bit color depth at 120 Hz

DVI-D (single link)

Video signal available through DVI port in optional HP Docking Station (sold separately)

supports resolutions up to 1600 x 1200 at both full and reduced blanking, and 1920 x 1200 at reduced blanking

Number of Displays Supported

Number of Displays with HP Advanced Docking Station	UMA	Discrete
ProBook 650	3	5

NOTE: HD content required to view HD images.

NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

STORAGE AND DRIVES

Primary Storage Bay

Hard Drives*

320/500/1 TB 5400 rpm SMART SATA II HDD;

320/500/750 GB 7200 rpm SMART SATA II HDD

500 GB 7200 rpm SED (Self Encrypting Drive)

500 GB 5400 rpm FIPS** SED (Self Encrypting Drive)

Solid State Drive*

128/180 GB 2.5" Solid State Drive

256 GB SED Solid State Drive

HP 3D DriveGuard (Windows only)

The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive

For hard drives and solid state drives, GB = 1 billion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8) of system disk is reserved for the system recovery software.



Features

* FIPS-certified, hardware-based AES-256 encryption image

NOTE: For hard drives, GB = 1 billion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8) of system disk is reserved for the system recovery software.

OPTICAL DRIVES

Fixed 9.5 mm Serial ATA Upgrade Bay

Blu-ray ROM DVD+/-RW SuperMulti DL Drive
DVD+/-RW SuperMulti DL Drive
DVD-ROM Drive

Weight saver

FLASH CACHE

32 GB M.2 (NGFF)

Optional 32 GB mSATA flash cache module support for Intel® Smart Response Technology. (Available only with standard non-SED hard drive. Not available with WWAN module)

MEMORY

Standard

DDR 3L PC3L-12800 (1600 MHz)
Two SODIMM slots supporting dual-channel memory
2GB, 4 GB, and 8 GB SODIMMs

Maximum

Upgradeable to 16384 MB with optional 8192 MB SODIMMs in slots 1 and 2

Dual-channel

Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

* Maximum memory capacities assume Windows 64-bit operating systems or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

NETWORKING/COMMUNICATIONS

Wireless

Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Broadband Wireless (WWAN) requires a Windows operating system and is available in select countries as a standard, factory configurable feature only. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.

Broadband Wireless (WWAN)

HP hs3110 HSPA+ Mobile Broadband*
HP lt4111 LTE/EV-DO/HSPA+ Mobile Broadband Module*, ** (US)
HP lt4112 LTE/HSPA+ Mobile Broadband Module*, ** (EMEA, APJ)

Wireless LAN (WLAN)*

Atheros 802.11b/g/n (1x1)***
Atheros 802.11b/g/n (1x1) and Bluetooth 4.0 Combo***



Features

Broadcom 802.11a/b/g/n (2x2) and Bluetooth 4.0 Combo***

Intel Centrino® Advanced-N 6205 802.11a/b/g/n (2x2) 6205***

Intel Centrino® Advanced-N 6235 802.11a/b/g/n and Bluetooth 4.0 Combo***

Intel Dual Band Wireless-AC 7260 802.11 ac (2x2) WiFi + BT 4.0 combo***, ****

NOTE: Supports Bluetooth® v2.1 on Linux operating systems

* WWAN is an optional feature sold separately or as an add on feature. WWAN connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors.

** 4G LTE not available on all products, in all regions and only available on products featuring Intel processors.

*** Wireless access point and Internet service is required and is not included. Availability of public wireless access points limited.

**** The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices.

Communications

Intel I217LM Gigabit Network Connection* QM87 (vPro)

Intel I217V Gigabit Network Connection* HM87 (non-vPro)

56K V.92 modem** (Available as a factory configurable option on the HP ProBook 650 only.)

* The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

** Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.

AUDIO/MULTIMEDIA

Audio

HD Audio with DTS Sound+

(2) Integrated stereo speakers

Integrated digital microphone (dual-microphone array when equipped with optional webcam)- correct use up

Function keys for microphone mute, volume up, volume down

Stereo headphone/line out

Stereo microphone in

Webcam

Optional* 720p HD** webcam

- HD format (widescreen)
- Supports videoconferencing (non-HD) and still image capture
- High quality fixed focus lens
- Video capture at various resolutions up to 1280x720 resolution (720p) and up to 30fps
- M-JPEG compression supports higher frame rates for video capture and videoconferencing
- Improved low light sensitivity
- Improved dynamic range
- Skype-ready

* Sold separately as an optional feature.

** HD content required to view HD images.



Features

KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

Keyboard

The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard. The 101/102-key compatible keyboard features a full-pitch key layout with desktop keyboard features, such as editing keys, both left and right control and alt keys, and function keys. US and International key layouts are available. Includes a separate numeric keypad (HP ProBook 650 only). Backlit keyboard available as an option.

Pointing Devices

Touchpad with gestures support, on/off button with LED indicator, two-way scroll, two pick buttons, optional point stick

Buttons and Function Keys

Separate launch buttons provide easy access to wireless on/off and speaker mute. Function keys provide control of features including: standby mode, display brightness, external display, microphone mute, volume down, and volume up.

SOFTWARE AND SECURITY

Preinstalled Software with Windows Operating System

BIOS

HP DriveLock | HP Automatic Drive Lock

HP BIOS Protection*

HP Disk Sanitizer**

HP SpareKey***

Update via Network

Master Record Security

Power On Authentication

Pre-Boot Security

Secure Erase****

Hybrid Boot

Measured Boot

Secure Boot

Absolute Persistence Module*****

* HP Tools partition with an HP BIOS required for automatic recovery.

** For the use cases outlined in the DOD 5220.22-M Supplement. Does not support Solid State Drives (SSDs). Initial setup required. Web history deleted only in Internet Explorer and Firefox browsers and must be user enabled.

*** Requires initial user set up.

**** For the methods outlined in the National Institute of Standards and Technology Special Publication 800-88.

***** The Absolute Persistence agent is shipped turned off, and will be activated when customers activate a purchased subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. The Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit: <http://www.absolute.com/company/legal/agreements/computrace-agreement>. Data Delete is an optional service provided by Absolute Software. If utilized, the Recovery Guarantee is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either obtain a PIN or purchase one or more RSA SecurID tokens from Absolute Software.

MultiMedia

CyberLink PowerDVD

CyberLink Power2Go (Optical drives)

CyberLink YouCam BE (Windows 7 only)

Communication

HP Connection Manager (Windows 7 only)

HP GPS and Location* (Windows 7 only)

HP Mobile Connect** (Windows 8 only)

HP Wireless Hotspot*** (Windows 8 only)



Features

Intel WiDi Software****

HP Roaming Alert (Windows 8 only)

Intel My WiFi and Wireless Drivers

HP Value Add Software

HP 3D DriveGuard

HP ePrint Driver***** (HP Exclusive)

HP PageLift (HP Exclusive)*****

HP Recovery Manager (Windows 7 only)

HP Support Assistant

HP Recovery Disc Creator (Windows 7 only)

UEFI System Diagnostics (Windows 8 only)

3rd Party

Adobe Flash Player (Commercial)

Skype*****

Buy Office

Free 50GB Box Cloud Storage & Collaboration Account*****

NOTE: HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8) of system disk is reserved for the system recovery software.

*GPS access requires an unobstructed path to multiple satellites. Performance may be affected if/when used inside of buildings, bridges or heavily congested metropolitan areas. Requires separately purchased GPS navigation software available from multiple GPS applications.

**Internet access required.

*** The wireless hotspot application requires an active internet connection and separately purchased data plan. While HP wireless hotspot is active, on-device applications will continue to work and will use the same data plan as the wireless hotspot. Wireless hotspot data usage may incur additional charges. Check with your service provider for plan details. Requires Windows 8.1 or HP Connection Manager for Windows 7.

**** Integrated Intel Wi-Di feature is available on select configurations only and requires separately purchased projector, tv or computer monitor with an integrated or external Wi-Di receiver. External Wi-Di receivers connect to the projector, tv or computer monitor via a standard HDMI cable, also sold separately.

***** Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see www.hp.com/go/eprintcenter). Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary.

***** HP PageLift requires Windows 7 or higher edition.

***** Skype is not offered in China.

***** Offer available on new 2013 HP commercial PC and requires Box registration. Offer subject to change without notice.

Security

Standard

HP Client Security*

HP Credential Manager

HP Password Manager

HP Drive Encryption (FIPS 140-2)**

HP Device Access Manager with Just In Time Authentication

TPM 1.2 Embedded Security Chip (Common Criteria EAL4+ Certified)



Features

HP File Sanitizer***
HP Spare Key
Integrated Smart Card Reader (FIPS 201)
Security lock slot
Security screw for bottom access door
Microsoft Security Essentials**** (Windows 7)
Microsoft Defender (Windows 8)

Optional

HP Fingerprint Sensor

* Not all features are remotely manageable.

** Requires Windows. Data is protected prior to Drive Encryption login. Turning the PC off or into hibernate logs out of Drive Encryption and prevents data access. Drive encryption planned to be available in October 2013.

*** For the use cases outlined in the DOD 5220.22-M Supplement. Does not support Solid State Drives (SSDs). Initial setup required. Web history deleted only in Internet Explorer and Firefox browsers and must be user enabled.

**** Opt in and internet connection required for updates.

For more information on HP security solutions refer to: <http://www.hp.com/go/security>.

POWER

Power Supply

Models with discrete graphics:

External 90W HP Smart AC Adapter

Models with integrated graphics:

External 65W HP Smart AC Adapter

External 90W HP Smart AC Adapter

Power cord included is 1.8 m (+/- 0.1 m) or 1.0 m (+/- 0.1 m).

Total length including external AC adapter is TBD feet (TBD meter).

HP Fast Charge

Primary Battery

HP 9-cell Lithium-Ion Battery (100 WHr)

HP 6-cell Lithium-Ion Battery (55 WHr)

HP 6-cell Long Life Lithium-Ion Battery (55 WHr)

HP 3-cell Lithium-Ion Battery (33 WHr)

Battery Life*

	Configurations with integrated graphics	Configurations with discrete graphics
HP ProBook 640 G1		
3-cell (31 WHr) with hard drive	TBD	N/A
3-cell (31 WHr) with 2.5" solid state drive	TBD	N/A
6-cell (55 WHr) with hard drive	Up to 11 hours 15 minutes	Up to 11 hours 15 minutes
6-cell (55 WHr) with 2.5" solid state drive	Up to 13 hours 15 minutes	Up to 13 hours 15 minutes
9-cell (100 WHr) with hard drive	Up to 20 hours 30 minutes	Up to 19 hours 45 minutes
9-cell (100 WHr) with 2.5" solid state drive	Up to 23 hours 15 minutes	Up to 23 hours



Features

6-cell Long Life (55 WHr) with hard drive	Up to 11 hours	Up to 10 hours 45 minutes
6-cell Long Life (55 WHr) with 2.5" solid state drive	N/A	N/A
HP ProBook 650 G1		
3-cell (31 WHr) with hard drive	TBD	N/A
3-cell (31 WHr) with 2.5" solid state drive	TBD	N/A
6-cell (55 WHr) with hard drive	Up to 11 hours 15 minutes	Up to 11 hours
6-cell (55 WHr) with 2.5" solid state drive	Up to 13 hours 15 minutes	Up to 13 hours
9-cell (100 WHr) with hard drive	Up to 19 hours 45 minutes	Up to 19 hours 15 minutes
9-cell (100 WHr) with 2.5" solid state drive	Up to 23 hours	Up to 22 hours
6-cell Long Life (55 WHr) with hard drive	Up to 11 hours	Up to 10 hours 45 minutes
6-cell Long Life (55 WHr) with 2.5" solid state drive	N/A	N/A

System Standby Time**

Up to TBD days

* Windows 7 battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See www.bapco.com for additional details.

** Standby life will vary depending on various factors including battery, Memory, CPU, EC and LAN chip. The maximum capacity of the battery will naturally decrease with time and usage.

NOTE: Fast Charge recharges your battery up to 90% within 90 minutes when the system is off (3- and 6-cell only).

Power Conservation

AMD PowerPlay technology (discrete models)

Hibernation

Standby

ACPI compliance

WEIGHTS & DIMENSIONS

HP ProBook 640 Notebook PC

Weight

Lightest possible configuration across battery and panel options (HD Panel, No-ODD, 3-cell (31Whr) Battery, M.2 128GB SSD) at 4.4lb / 2kg.

Lightest Weight Configurations (across panel, battery and ODD options, if applicable)

	3-cell (31Whr)	6-Cell (55Whr)	6-Cell Long Life (55Whr)	9-Cell (100Whr)
No-ODD	4.4lb/2kg	4.59lb/2.083kg	4.65lb/2.109kg	4.80lb/2.18kg
ODD	4.69lb/2.13kg	4.857b/2.212kg	4.94lb/2.24kg	5.09lb/2.31kg



Features

Dimensions (w x d x h)

13.39 x 9.33 x 0.99 (front)/1.14 (rear) in

34.0 x 23.7 x 2.53 (front)/2.90 (rear) cm

HP ProBook 650 Notebook PC

Weight

Lightest possible configuration across battery and panel options (HD Panel, No-ODD, 3-cell (31Whr) Battery, M.2 128GB SSD) at 5.1lb / 2.32kg

Lightest Weight Configurations (across panel, battery and ODD options, if applicable)

	3-cell (31Whr)	6-Cell (55Whr)	6-Cell Long Life (55Whr)	9-Cell (100Whr)
No-ODD	5.1lb/2.32kg	5.30lb/2.40kg	5.35lb/2.43kg	5.51lb/2.5kg
ODD	5.39lb/2.50kg	5.58lb/2.53kg	5.64lb/2.56kg	5.80lb/2.63kg

Dimensions (w x d x h)

14.88 x 10.12 x 0.99 (front) -1.14 in (rear)

37.80 x 25.70 x 2.53 (front) -2.90 cm (rear)

PORTS/SLOTS

Ports

USB 3.0 – Three (640)

USB 3.0 – Four (650)

USB 3.0 charging port– One

DisplayPort 1.2 – One

VGA – One

Stereo microphone input – One

Headphone/line out – One

RJ-45 (Ethernet) – One

Docking connector – One

RS-232 serial port– One*

Power connector – One

* ProBook 650 only

Expansion Slots

Media Card Reader

- supports SD, SDHC, SDXC

SERVICE AND SUPPORT

HP Services offers limited 3-year and 1-year warranty options depending on country;

1-year limited warranty on primary battery. On-site service and warranty upgrades are also available. Optional* HP Care Pack Services** are extended service contracts which go beyond your standard warranties. For more details visit:

<http://www.hp.com/go/lookuptool>.

*Sold separately or as an optional feature.

** Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on



Features

date of hardware purchase. Restrictions and limitations apply. Consult the HP Customer Support Center for details.
<http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>

NOTE: Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit www.hp.com/go/cpc



Technical Specifications

SYSTEM UNIT

Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	TBD
	Average Operating Power	TBD W
	Max Operating Power	Discrete < 90W UMA < 65W or 90W
Temperature	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Non-operating	-4° to 140° F (-20° to 60° C)
Relative Humidity	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	Operating	40 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	Operating	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
Planned Industry Standard Certifications	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	ENERGY STAR®	Select models*
	EPEAT	Registered TBD in United States**
	ICES	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	KC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELUS	Yes
	CIT	Yes
	GOST	Yes
	Saudi Arabian Compliance (ICCP)	Yes
	SABS	Yes
	UKRSERTCOMPUTER	Yes

* Configurations of the HP ProBook 640 and HP ProBook 650 that are ENERGY STAR qualified are identified as HP ProBook 640 ENERGY STAR and HP ProBook 650 ENERGY STAR on HP websites and on www.energystar.gov.

** EPEAT registration varies by country. See www.epeat.net for registration status by country. EPEAT status listed above applies to U.S.

For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

DISPLAYS

14.0" diagonal LED-backlit HD anti-glare SVA eDP 1.2 flat (1366x768)	Outline Dimensions (W x H x D)	12.6 x 8.09 x 0.14 in (32.09 x 20.56 x 0.36 cm)
	Active Area	12.18 x 6.85 in (30.94 x 17.395 cm)
	Weight	0.71 lb (320g) (max)
	Diagonal Size	14.0 in (35.6cm)



Technical Specifications

	Surface Treatment	Anti-glare	
	Contrast Ratio	300:1 (min)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Format	1366 x 768 (HD)
		Configuration	RGB Stripe
	Interface	eDP 1.2 (1 lane)	
	LCD Mode	TN	
	PPI	125 ppi	
	Viewing Angle	SVA 40/40/15/30 (Left/Right/Down/Up)	
14.0" diagonal LED-backlit HD+ anti-glare SVA eDP 1.2 flat (1600 x 900)	Outline Dimensions (W x H x D)	12.6 x 8.09 x 0.14 in (32.09 x 20.56 x 0.36 cm)	
	Active Area	12.19 x 6.86 in (30.96 x 17.415 cm)	
	Weight	0.72 lb (325 g) (max)	
	Diagonal Size	14.0 in (35.6cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	300:1 (min)	
	Refresh Rate	60 Hz	
	Brightness	250 nit (typical)	
	Pixel Resolution	Format	1600 x 900 (HD+)
		Configuration	RGB Stripe
	Interface	eDP 1.2 (1 lane)	
	LCD Mode	TN	
	PPI	131 ppi	
	Viewing Angle	SVA 40/40/15/30 (Left/Right/Down/Up)	
14.0" diagonal LED-backlit FHD anti-glare UWA eDP 1.3 slim PSR (1920 x 1080)	Outline Dimensions (W x H x D)	12.6 x 8.09 x 0.12 in (32.09 x 20.56 x 0.3 cm)	
	Active Area	12.18 x 6.85 in (30.93 x 17.4 cm)	
	Weight	0.75 lb (340 g) (max)	
	Diagonal Size	14.0 in (35.6cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	600:1 (min)	
	Refresh Rate	60 Hz	
	Brightness	300 nit (typical)	
	Pixel Resolution	Format	1920 x 1080 (FHD)
		Configuration	RGB Stripe
	Interface	eDP 1.3+PSR (2 lane)	
	LCD Mode	IPS/FFS/VA	
	PPI	157 ppi	



Technical Specifications

Viewing Angle		UWVA 85/85/85/85 (Left/Right/Down/Up)
15.6" diagonal LED-backlit HD anti-glare SVA eDP 1.2 flat (1366x768)	Outline Dimensions (W x H x D)	14.17 x 8.83 x 0.15 in (36.0 x 22.43 x 0.38 cm)
	Active Area	13.55 x 7.62 in (34.42 x 19.35 cm)
	Weight	< 1.1 lb (500 g) (max)
	Diagonal Size	15.6 in (39.62 cm)
	Surface Treatment	Anti-glare
	Contrast Ratio	300:1 (min)
	Refresh Rate	60 Hz
	Brightness	200 nit (typical)
	Pixel Resolution	Format 1366 x 768 (HD)
		Configuration RGB Stripe
	Interface	eDP 1.2 (1 lane)
	LCD Mode	TN
	PPI	101 ppi
	Viewing Angle	SVA 40/40/15/30 (Left/Right/Down/Up)
15.6" diagonal LED-backlit FHD anti-glare SVA eDP 1.2 slim (1920x1080)	Outline Dimensions (W x H x D)	360.00 x 207.00 x 3.2 max.
	Active Area	344.16 x 193.59
	Weight	360max
	Diagonal Size	15.6"
	Surface Treatment	AG/BV
	Contrast Ratio	500:1 (typ) - BV, 400:1 (typ) - AG
	Refresh Rate	60Hz
	Brightness	300nits
	Pixel Resolution	Format 1920 x 1080 (FHD)
		Configuration RGB Stripe
	Interface	eDP 1.2 (2 lane)
	LCD Mode	TN
	PPI	141
	Viewing Angle	SVA 45/45/25/35

STORAGE AND DRIVES

Internal Storage	
320 GB* 5400 rpm SATA Hard Drive	Drive Weight 0.25 lbs (115 g)
	Capacity 320 GB
	Height 0.37 in (9.5 mm)
	Width 2.75 in (70 mm)



Technical Specifications

500 GB* 5400 rpm SATA Hard Drive	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 300 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track 1.5 ms Average 11 ms Maximum 22 ms
	Rotational Speed	7200 rpm
	Logical Blocks	625,142,448
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security
	Drive Weight	0.22 lb (101 g)
	Capacity	500 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 300 MB/s (Drive Capability)
1 TB* 5400 rpm SATA Hard Drive	Seek Time (typical reads, including settling)	Single Track 3 ms Average 13 ms Maximum 24 ms
	Rotational Speed	5400 rpm
	Logical Blocks	976,773,168
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security
	Drive Weight	0.254 lb (115 g)
	Capacity	1 TB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 300 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track 3 ms Average 13 ms Maximum 24 ms
	Rotational Speed	5400 rpm
320 GB* 7200 rpm SATA Hard Drive	Logical Blocks	1,953,525,168
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security
	Drive Weight	0.25 lbs (115 g)
	Capacity	320 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 300 MB/s (Drive Capability)



Technical Specifications

Seek Time (typical reads, including settling)	Single Track	1.5 ms
	Average	11 ms
	Maximum	22 ms
Cache	16 MB	
Rotational Speed	7200 rpm	
Logical Blocks	625,142,448	
Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
Features	ATA Security	

500 GB* 7200 rpm SATA Hard Drive

Drive Weight	0.25 lbs (115g)
Capacity	500 GB
Height	0.37 in (9.5 mm)
Width	2.75 in (70 mm)
Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
Transfer Rate	Synchronous (maximum) 300 MB/s (Drive Capability)
Seek Time (typical reads, including settling)	Single Track 1.5 ms
	Average 11 ms
	Maximum 22 ms
Rotational Speed	7200 rpm
Logical Blocks	976,773,168
Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
Features	ATA Security

750 GB* 7200 rpm SATA Hard Drive

Drive Weight	0.25 lbs (115g)
Capacity	750 GB
Height	0.37 in (9.5 mm)
Width	2.75 in (70 mm)
Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
Transfer Rate	Synchronous (maximum) 300 MB/s (Drive Capability)
Seek Time (typical reads, including settling)	Single Track 1.5 ms
	Average 11 ms
	Maximum 22 ms
Rotational Speed	7200 rpm
Logical Blocks	1,465,149,168
Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
Features	ATA Security

500 GB* 7200 rpm SMART SATA II Self Encrypting Drive

Drive Weight	0.25 lbs (115g)
Capacity	500 GB
Height	0.37 in (9.5 mm)
Width	2.50 in (63.5 mm)



Technical Specifications

500 GB* 5400 rpm SATA Drive Weight FIPS** Hard Drive	Interface	ATA-8, SATA 2.6, 3.0 Gb/s	
	Transfer Rate	Synchronous (maximum)	300 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1 ms
		Average	12 ms
		Maximum	20 ms
	Cache	16 MB	
	Rotational Speed	7200 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	
	Capacity	0.25 lbs (95g)	
	Height	500 GB	
	Width	0.28 in (7 mm)	
SATA 6 Gb/s 128 GB*, 2.5- inch Solid State Drive	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum)	300 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1.5 ms
		Average	11 ms
		Maximum	22 ms
	Cache	16 MB	
	Rotational Speed	5400 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	
	Drive Weight	73 Grams	
	Capacity	128 GB	
	Height	0.276 in (7 mm)	
SATA 6 Gb/s 180 GB*, 2.5- inch SATA Solid State Drive	Width	2.76 in (70 mm)	
	Interface	SATA 3 (6 Gb/s)	
	Performance	Maximum Sequential Read	Maximum Sequential Write
		415 MB/s	175 MB/s
	Logical Blocks	250,069,680	
	Operating Temperature	32° to 158°F (0° to 70°C) [case temp]	
	Features	ATA Security; ATA-8; SATA 3.0; DIPM; TRIM	
	Drive Weight	78 Grams	
	Capacity	180 GB	
	Height	0.276 in (7 mm)	
	Width	2.76 in (70 mm)	
	Interface	SATA Gen 3 (6 Gb/s)	



Technical Specifications

	Performance	Maximum Sequential Read	Maximum Sequential Write
		Up to 550 MB/s (Compressible performance)	Up to 520 MB/s (Compressible performance)
	Logical Blocks	351,651,888	
	Operating Temperature	32° to 158°F (0° to 70°C) [case temp]	
SATA 6 Gb/s 256 GB*, 2.5-inch SATA SED Solid State Drive	Features	ATA Security; ATA-8, SATA 3.0; DIPM; TRIM	
	Drive Weight	73 Grams	
	Capacity	256 GB	
	Height	0.276 in (7 mm)	
	Width	2.76 in (70 mm)	
	Interface	SATA 3 (6 Gb/s)	
	Performance	Maximum Sequential Read	Maximum Sequential Write
		Up to 460 MB/s	Up to 260 MB/s
	Logical Blocks	500,118,192	
	Operating Temperature	32° to 158°F (0° to 70°C) [case temp]	
	Features	ATA Security; ATA-8 compliant; SATA 3.0; DIPM; TRIM	

* For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 16 GB (for Windows 7) and 36 GB (for Windows 8) of system disk is reserved for the system recovery software.

** * FIPS-certified, hardware-based AES-256 encryption image.

Optical Drives

Blu-ray ROM DVD+/-RW SuperMulti DL Drive	Access Times	Random	<190 ms CD-ROM (typical) <180ms DVD-ROM (typical) <230 ms BD-ROM (typical)
	Max Data Transfer Rate	24X CD-ROM 8X DVD-ROM 24X CD-R 16X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 4X - DVD+R Dual Layer 4X - DVD-R Dual Layer 5X DVD-RAM 6X BD-ROM	
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	



Technical Specifications

		Supported Media (read)	CD-DA, , CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW. DVD-RAM, BD-ROM, BD-R, BD-RE
		Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+R DL, DVD+RW, DVD-R, DVD-R DL, DVD-RW, DVD-RAM
		Max Media Capacity (read)	50.0 GB
		Max Media Capacity (write)	8.5 GB
		Transport	Tray Loading
DVD+/-RW SuperMulti DL Drive	Access Times	Random	<140ms CD (typical) < 160 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM 8X DVD 24X CD-R 24X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 6X - DVD+R Dual Layer 6X - DVD-R Dual Layer 5X DVD-RAM	
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM, DVD+R DL, DVD-R DL	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	
	Access Times	Random	< 140 ms CD (typical) < 160 ms DVD (typical)
DVD-ROM Drive			



Technical Specifications

Max Data Transfer Rate	24X CD-ROM 8X-DVD
Transfer Mode	UDMA Mode 5
Interface	Gen 1 SATA
Supported Media (read)	CD-DA, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM
Supported Media (write)	None
Max Media Capacity (read)	8.5GB
Transport	Tray Loading

SECURITY

HP Fingerprint Reader (optional)	Mobile Voltage Operation 3.0V-3.6V
	Operating Temperature 14° – 167°F (-10° – 75°C)
	Current Consumption 36 mA peak
	Image
	Low Latency Wait for Finger 950 uA
	Capture Rate 6000 lines/sec
	ESD Resistance IEC 61000-4-2 4B (±15KV)
	Detection Matrix 200*1 (plus another secondary line) 508 dpi 12*3 mm sensor area

NETWORKING/COMMUNICATIONS

Intel I217LM Gigabit Network Connection	Connector RJ-45
	System Interface Integrated on PCA
	Controller Intel I217LM GbE platform LAN connect networking controller
	Memory 9 KB FIFO packet buffer memory
	Data rates supported 10/100/1000 Mbps
	802.1P 802.1Q
IEEE Compliance	802.1as/1588 802.3 802.3ab 802.3az 802.3u
Bus architecture	PCI Express and SMBus



Technical Specifications

Data transfer mode	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state)
Power requirement	Requires 3.3V and 0.9V or just 3.3V with integrated regulators Power consumption 0.535 Watts
Boot ROM support	Yes
Network transfer mode	Full-duplex Half-duplex (not supported for the 1000BASE-T transceiver)
Network transfer rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
Environmental	Operating 0° to 85° C Temperature: Operating Humidity: 60% RH
Management	WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostic.
Alerting	ASF 2.0 support; iAMT 9.0 support

HP hs3110 HSPA+ Mobile Broadband Module*	Technology/Operating Bands	CDMA/1xRTT/EvDO: 800MHz (Cell), 1900MHz (PCS) GSM/GPRS/EDGE: 850MHz (Cell), 900MHz (EGSM), 1800MHz (DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), 900MHz (UTRA FDD Band VIII), 850 MHz (UTRA FDD Band V) LTE: 700 MHz (Verizon, Band XIII)
	Mobile Operator	Verizon (US only)
	Wireless Protocol Standards	GSM/GPRS/EDGE: Class B, Multi-slot class 10 operation, coding schemes CS1 - CS4 and MSC1 - MSC9. CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-856, IS-2000 UMTS/WCDMA: Release 99 and Release 7 LTE: Power Class III as per 3GPP TS 36.101
	Wireless Parametric Standards	Complies with 3GPP specifications Release 8 for LTE
	Maximum Data Rates	EvDO (Revision A) - 3.1 Mbps (Download), 1.8 Mbps (Upload) WCDMA (DC-HSPA+) - 42Mbps (Download) LTE (Category 3) - 100 Mbps (Download), 50Mbps (Upload)
	GPS	Standalone, Assisted, XTRA
	GPS Bands	1575.42 MHz (± 1.023 MHz)
	Maximum Output Power	GSM/GPRS/EDGE: 32dBm (+/-1) WCDMA: 24dBm (+0.7/-2.3) LTE: +23 dBm (+2.7 dBm/-1.7 dBm) 1xRTT/EvDO: +24 dBm (+0.5 dBm/-1.5 dBm)
	Maximum Power Consumption	2700mA (peak)



Technical Specifications

Power Consumption, Sleep Mode	10 mA
Power Management	USB selective suspend Integrated notebook wireless button
Antenna Type	Dual high efficiency 6 band antennae with spatial diversity, mounted in the display enclosure
Form Factor	PCI-Express MiniCard, USB 2.0 interface
Weight	< 10 g
Dimensions (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 5 mm)
Voltage, Operating	3.3v +/- 9%
Temperature, Operating (from TIA/EIA/IS-98-D)	-4° to 149° F (-20° to 65° C)
Temperature, Non-operating, 96 hours (from MIL-STD 202 Method 108)	-40° to 185° F (-40° to 85° C)
Humidity, Non-operating	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
LED Activity	LED Off - Radio Off; Solid LED On - Radio On

* Mobile Broadband is an optional feature sold separately or as an add on feature. Connection requires wireless data service contract, network support, and is not available in all areas. Contact service provider to determine the coverage area and availability. Connection speeds will vary due to location, environment, network conditions, and other factors.

HP It4111 LTE/EV-DO/HSPA+ 4G WWAN*

Technology/Operating bands	LTE FDD all bands with diversity: 1900 MHz (Band II) ¹ , 1700/2100MHz (Band IV (AWS), 850MHz (Band V), 700MHz (Band XIII), 700MHz (Band XVII), 1900MHz G Block (Band XXV) WCDMA/HSDPA/HSUPA/HSPA+: all bands with diversity: 2100 MHz (Band I), 1900 MHz (Band II) , AWS 1700/2100MHz (Band IV), 850 MHz (Band V), 800 MHz (Band VIII) GSM/GPRS/EDGE: 1900 MHz, 1800 MHz , 850 MHz , 900 MHz CDMA: Cellular 800MHz (BC0), PCS 1900MHz (BC1)
Wireless protocol standards	3GPP Release 8 LTE Specification WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification EVDO Release 0 and Release A
Wireless parametric standards	Complies with 3GPP specifications Release 8 for LTE
Maximum data rates	LTE (Category 3): 100 Mbps (Download), 50Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload) EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)
GPS	Standalone GPS, A-GPS, GPS XTRA
GPS bands	1575.42 MHz (± 1.023 MHz), GLONASS 1596-1607MHz
Maximum output power	LTE: +23 dBm (+/- 1 dBm) WCDMA: +23 dBm (+/- 1 dBm)



Technical Specifications

	GSM850/900, GMSK: +32dBm (+/- 1dBm) GSM850/900, 8PSK: +27dBm (+/- 1dBm) DCS1800 / PCS 1900, GMSK: +29dBm (+/- 1dBm) DCS1800 / PCS 1900, 8PSK: +26dBm (+/- 1dBm) CDMA: +24dBm (+/- 1dBm)
Maximum power consumption	LTE: 1,200 mA (peak); <900 mA (average) WCDMA: 1,100 mA (peak); <800 mA (average) EGPRS: 2,500 mA (peak); <700 mA (average)
Power consumption, sleep mode	2 mA
Power management	USB selective suspend, Integrated notebook wireless button
Antenna type	Dual high efficiency multi-band antennae with spatial diversity
Form Factor	M.2, 3042-S3 Key B
Weight	6 g
Dimensions (Length x Width x Thickness)	42 mm x 30 mm x 2.3 mm
Voltage, Operating	3.135 V to 4.4 V (3.3 V +1.1V/-0.165V)
Temperature, operating (from TIA/EIA/IS-98-D)	-13° to 140° F (-25° to 60° C)
Temperature, non-operating, 96 hours (from MIL-STD 202 Method 108)	-40° to 185° F (-40° to 85° C)
Humidity, non-operating	95% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
LED activity	LED Off – Radio Off; Solid LED On – Radio On
¹ 1900 MHz (Band II) and 850 MHz (Band V) not supported at launch but support planned in a future firmware update. * 4G LTE not available on all products, in all regions and only available on products featuring Intel processors. WWAN use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Connection speeds will vary due to location, environment, network conditions, and other factors.	
HP It4112 LTE/HSPA+ Gobi 4G Module*	
Technology/Operating bands	LTE FDD all bands with diversity: 2100 MHz (Band I), 1900 MHz (Band II), 1800 MHz (Band III), 850 MHz (Band V), 2600 MHz (Band VII), 900 MHz (Band VIII), 800 MHz (Band XX, DD800) WCDMA/HSDPA/HSUPA/HSPA+ all bands with diversity: 2100 MHz (Band I), 1900 MHz (Band II), 800 MHz (Band V), 900 MHz (Band VIII) GSM/GPRS/EDGE: 1900 MHz (Band II), 1800 MHz (Band III), 850 MHz (Band V), 900 MHz (Band VIII)
Wireless protocol standards	3GPP Release 8 LTE Specification WCDMA R99, 3GPP Release 5, 6 and 7 UMTS Specification
Wireless parametric standards	Complies with 3GPP specifications Release 8 for LTE
Maximum data rates	LTE (Category 3): 100 Mbps (Download), 50Mbps (Upload) DC-HSPA+: 42 Mbps (Download), 5.76 Mbps (Upload) HSPA+: 21.6 Mbps (Download), 5.76 Mbps (Upload)



Technical Specifications

	EDGE: 236.8 kbps (Download), 236.8 kbps (Upload) GPRS: 85.6 kbps(Download), 85.6 kbps (Upload)
GPS	Standalone
GPS bands	1575.42 MHz (\pm 1.023 MHz), GLONASS 1596-1607MHz
Maximum output power	LTE: +23 dBm (+/- 2 dBm) WCDMA: +23.5 dBm (+/- 1 dBm) GPRS Band II, III: +29.5 dBm (+/- 1 dBm) GPRS Band V, VIII: +32.5 dBm (+/- 1 dBm) EGPRS Band II, III: +26.5 dBm (+/-1.5 dBm) EGPRS Band V, VIII: +27.5 dBm (+/-1.5 dBm)
Maximum power consumption	LTE: 1,200 mA (peak); <900 mA (average) WCDMA: 1,100 mA (peak); <800 mA (average) EGPRS: 2,800 mA (peak); <700 mA (average)
Power consumption, sleep mode	3 mA
Power management	USB selective suspend, Integrated notebook wireless button
Antenna type	Dual high efficiency multi-band antennae with spatial diversity
Form Factor	M.2, USB 2.0 interface
Weight	6 g
Dimensions (Length x Width x Thickness)	42 mm x 30 mm x 2.3 mm
Voltage, Operating	3.135 V to 4.4 V (3.3 V +1.1V/-0.165V)
Temperature, operating (from TIA/EIA/IS-98-D)	14° to 131° F (–10° to 55° C)
Temperature, non-operating, 96 hours (from MIL-STD 202 Method 108)	–40° to 185° F (–40° to 85° C)
Humidity, non-operating	95% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
LED activity	LED Off - Radio Off; Solid LED On - Radio On

* 4G LTE not available on all products, in all regions and only available on products featuring Intel processors. WWAN use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Connection speeds will vary due to location, environment, network conditions, and other factors.

Atheros 802.11 b/g/n (1x1)*

Wireless LAN Standards	IEEE 802.11b IEEE 802.11g IEEE 802.11n
Interoperability	Wi-Fi certified
Frequency Band	2.4 GHz
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: many possible data rates, ranging from 6 Mbps to 300 Mbps,



Technical Specifications

	depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification	
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM	
Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.	
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output²	13.5 dBm, nominal	
Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Associated to Access Point, Idle: 250 mW nominal Wireless Button Off: 100 mW nominal Radio disabled: 75 mW nominal	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity³	72.2 Mbps: -70 dbm, 54 Mbps: -74 dBm, 11 Mbps: -88 dBm , 1 Mbps: -95 dBm	
Antenna Connections	High efficiency antenna with spatial diversity, mounted in the display enclosure	
Form Factor	PCI-Express Half-MiniCard 1.2	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)	
Operating Voltage	3.3v +/- 9%	
Temperature	Operating	14° to 158° F (-10° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON	

1. Check latest software/driver release for updates on supported security features.

2. Maximum output power may vary by country according to local regulations.

3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

* Wireless access point and internet service required. Availability of public wireless access points limited.



Technical Specifications

Atheros 802.11b/g/n (1x1) and Bluetooth 4.0 Combo*	Wireless LAN Standards	IEEE 802.11b IEEE 802.11g IEEE 802.11n
	Interoperability	Wi-Fi certified
	Frequency Band	2.402 – 2.482 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps
		802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
		802.11n: card will support rates for NSS=1 for RX and TX for 20 MHz channels. Short and long guard interval shall be supported.
	Modulation	Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM
	Security¹	Support for WPA and WPA2 Support for CCX version up to and including CCXv5 Support for the following EAP types: EAP-TLS, EAP-PEAPv0, EAP-PEAPv1, EAP-PEAPv2, EAP-FAST, EAP-SIM Support for using both machine and user credentials in a single profile. The same profile must be able to be used both before user login and after user login Support the use of Windows Domain credentials IP provider shall have support for an auto-login to Windows using a PLC and LEAP via the IP provider UI (http://support.microsoft.com/default.aspx/kb/315231). Must have Windows Single Sign On support so that customers can use the WLAN as their primary domain network. With regard to SSO, network association and authentication must occur and be successful before Windows domain authentication is attempted Support for use of the UI client in a user account with limited local security privileges Client service / profile manager must support the WiFi Alliance's WiFi Protected Setup specification. Any credentials saved in a profile must be done securely such that they cannot be re-used by any other user or machine.
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power²	13.5dBm , minimum
	Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Associated to Access Point, Idle: 250 mW nominal Wireless Button Off: 100 mW nominal Radio disabled: 75 mW nominal
	Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
	Receiver Sensitivity³	802.11b:-95 dBm (1 Mbps), -93 dBm (2 Mbps), -91 dBm (5.5 Mbps), -88 dBm (11 Mbps)



Technical Specifications

	802.11g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps)	
	802.11n:-70dBm (72.2 Mbps)	
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure	
Form Factor	PCI-Express Half-MiniCard	
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	14° to 158° F (-10° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Off – Radio OFF; Solid LED On – RadioON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 	
Bluetooth Specification	V4.0 High Speed, V2.1+EDR, backwards compatible with V1.1, 1.2 and 2.0	
Number of Available Channels	79 (1 MHz) available channels	
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps	
	Synchronous Connection Oriented links up to 3, 64 kbps, voice channels	
	Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric	
Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)	
Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate	
Power Consumption	Peak (Tx) 330 mW	
	Peak (Rx) 230 mW	
	Sleep <17 mW	
Antenna	Internally integrated within module	
Range	Up 33 ft (10 m)	
Electrical Interface	USB 2.0 compliant	
	Microsoft Windows Plug and Play compliant	
Bluetooth Software Supported	Broadcom Bluetooth for Windows	
	Microsoft Windows Bluetooth Software	
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves	
Security	Full support of Bluetooth Security Provisions	



Technical Specifications

Power Management	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Bluetooth Profiles Supported	Generic Access Profile (GAP) Service Discovery Application Profile (SDAP) Serial Port Profile (SPP) Dial_Up Networking Profile (DUN) Generic Object Exchange Profile (GOEP) Object Push Profile (OPP) File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) Personal Area Networking Profile (PAN) Human Interface Device Profile (HID) Generic Audio/Video Distribution Profile (GAVDP) Advanced Audio/Video Distribution Profile (A2DP) FAX Profile (FAX) Basic Imaging Profile (BIP) Headset Profile (HSP) Hands Free Profile (HFP) Basic Printing Profile (BPP) VDP (Video Distribution Profile) AVRCP (Audio Video Remote Control Profile)

* Wireless access point and internet service required. Availability of public wireless access points limited.

**Broadcom 802.11
a/b/g/n (2x2) with
Bluetooth® v4.0
combo***

Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n
Interoperability Frequency Band	Wi-Fi certified 802.11b/g/n <ul style="list-style-type: none"> • 2.402 – 2.482 GHz 802.11a/n <ul style="list-style-type: none"> • 4.9 – 4.95 GHz (Japan) • 5.15 – 5.25 GHz • 5.25 – 5.35 GHz • 5.47 – 5.725 GHz • 5.825 – 5.850 GHz • 2.402 – 2.482 GHz
Data Rates	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps



Technical Specifications

	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: card will support rates for NSS=1 and NSS=2 for RX and TX for 20 and 40 MHz channels. Short and long guard interval shall be supported. Direct Sequence Spread Spectrum BPSK, QPSK, CCK, 16-QAM, 64-QAM
Modulation	
Security¹	<ul style="list-style-type: none"> • IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • IEEE 802.11i • Cisco Certified Extensions, all versions through V5 • WAPI
Network Architecture	Ad-hoc (Peer to Peer)
Models	Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power²	<ul style="list-style-type: none"> • 2.4G: +13.5dBm minimum • 5G: +12dBm minimum • Maximum output power must be able to achieve modular regulatory certification with notebooks that have antennas >20cm from the user and peak gain of +3dBi at 2.4GHz and +4dBi at 5GHz
Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 250 mW (WLAN Associated) Idle mode: 100 mW (WLAN unassociated) Radio disabled: 75 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	802.11b:-95 dBm (1 Mbps), -93 dBm (2 Mbps), -91 dBm (5.5 Mbps), -88 dBm (11 Mbps) 802.11a/g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps) 802.11n:-69 dBm (72.2 Mbps), -66 dBm (300 Mbps)
Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications
Form Factor	PCI-Express Half-MiniCard
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
Weight	3.3g



Technical Specifications

Operating Voltage	3.3v +/- 9%
Temperature	Operating 14° to 158° F (–10° to 70° C) Non-operating –40° to 176° F (–40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
Bluetooth Specification	V4.0 High Speed, V2.1+EDR, backwards compatible with V1.1, 1.2 and 2.0
Number of Available Channels	79 (1 MHz) available channels
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
Transmit Power	–6 dBm to 4 dBm (Bluetooth Class II)
Receiver Sensitivity	Better than –80 dBm at 0.1 % raw bit error rate
Power Consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW Sleep <17 mW
Antenna	Internally integrated within module
Range	Up to 33 ft (10 m)
Electrical Interface	USB 2.0 compliant
Bluetooth Software Supported	Microsoft Windows Plug and Play compliant Broadcom Bluetooth for Windows
Link Topology	Microsoft Windows Bluetooth Software Point to Point, Multipoint Pico Nets up to 7 slaves
Security	Full support of Bluetooth Security Provisions
Power Management	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Bluetooth Profiles Supported	Generic Access Profile (GAP) Service Discovery Application Profile (SDAP) Serial Port Profile (SPP) Dial_Up Networking Profile (DUN) Generic Object Exchange Profile (GOEP) Object Push Profile (OPP) File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP)



Technical Specifications

Personal Area Networking Profile (PAN)
Human Interface Device Profile (HID)
Generic Audio/Video Distribution Profile (GAVDP)
Advanced Audio/Video Distribution Profile (A2DP)
FAX Profile (FAX)
Basic Imaging Profile (BIP)
Headset Profile (HSP)
Hands Free Profile (HFP)
Basic Printing Profile (BPP)
VDP (Video Distribution Profile)
AVRCP (Audio Video Remote Control Profile)

* Wireless access point and internet service required. Availability of public wireless access points limited.

Intel Dual Band Wireless- Wireless LAN Standards N 7260 802.11 a/b/g/n (2x2) WiFi + Bluetooth 4.0 Combo Adaptor*

Interoperability

IEEE 802.11 a
IEEE 802.11 b
IEEE 802.11 g
IEEE 802.11 n
Wi-Fi certified
Cisco Compatible Extensions Program compliant with Microsoft Windows 7, Windows Vista and XP (details at:
<http://www.hp.com/go/notebooks/WLAN>)

Frequency Band

802.11b/g/n 2.402 - 2.482 GHz
802.11a/n 4.9 - 4.95 GHz (Japan)
5.15 - 5.25 GHz
5.25 - 5.35 GHz
5.47 - 5.725 GHz
5.825 - 5.850 GHz

Antenna Structure

2 transmit; 2 receive (2x2)

Data Rates

802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
802.11b: 1, 2, 5.5, 11 Mbps
802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
802.11n: card will support rates for NSS=1 and NSS=2 for RX and TX for 20 and 40 MHz channels. Short and long guard interval shall be supported.

Modulation

Direct Sequence Spread Spectrum
CCK, BPSK, QPSK, 16-QAM, 64-QAM

Security¹

- IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only
- AES-CCMP: 128 bit in hardware
- 802.1x authentication
- WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES.
- WPA2 certification
- IEEE 802.11i
- Cisco Certified Extensions, all versions through V5
- WAPI

Sub-channels

Multinational support with frequency bands and channels compliant to local regulations.

Network Architecture Models

Ad-hoc (Peer to Peer)
Infrastructure (Access Point Required)

Roaming

IEEE 802.11 compliant roaming between band Access Points



Technical Specifications

Output Power²	<ul style="list-style-type: none"> ○ 2.4G: +13.5dBm minimum ○ 5G: +12dBm minimum
Power Consumption	Transmit: 2.0 Watts Receive: 1.6 Watts Idle mode ³ : 250 mW (WLAN Associated) Idle mode: 100 mW (WLAN unassociated) Radio off: 75 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity⁴	802.11g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps) 802.11b:-95 dBm (1 Mbps), -93 dBm (2 Mbps), -91 dBm (5.5 Mbps), -88 dBm (11 Mbps) 802.11g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps) 802.11n:-69 dBm (150 Mbps), -66 dBm (300 Mbps)
Antenna Connections	2 U.FL type connectors (output impedance of 50 ± 2 ohms)
Form Factor	PCI-Express Half-MiniCard
Dimensions	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)
Weight	TBD
Operating Voltage	3.3v +/- 9%
Temperature	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON
1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode and on battery power. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software suppliers. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.	
HP Integrated Module with Bluetooth 4.0+EDR Wireless Technology	
Bluetooth Specification	4.0+EDR Compliant
Dimensions	1.18 x 0.26 x 0.13 in (30 x 6.5 x 3.25 mm)
Frequency Band	2402 to 2480 MHz
Number of Available Channels	79 (1 MHz) available channels
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels



Technical Specifications

Transmit Power	Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
Receiver Sensitivity	-1.5 dBm to 4 dBm (Bluetooth Class II)
Power Consumption	Better than -20 dBm at 0.1 % raw bit error rate Peak (Tx) 264 mW Peak (Rx) 231 mW Sleep <1 mW
Antenna	Internally integrated within module
Range	Up to 33 ft (10 m)
Electrical Interface	USB 2.0 compliant Microsoft Windows Plug and Play compliant
Bluetooth Software Supported	Broadcom Bluetooth for Windows Microsoft Windows Bluetooth Software
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
Security	Full support of Bluetooth Security Provisions
Power Management	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Bluetooth Profiles Supported	Serial Port Profile (SPP) ¹ Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) ^{1,2} Generic Object Exchange Profile (GOEP) ^{1,2} Object Push Profile (OPP) ^{1,2} File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) ^{1,2} Personal Area Networking Profile (PAN) ^{1,2} Human Interface Device Profile (HID) ^{1,2} FAX Profile (FAX) Basic Imaging Profile (BIP) ² Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)
1. indicates the profile is supported by Microsoft Windows XP SP2	
2. indicates the profile is part of Windows Vista	
* Wireless access point and internet service required. Availability of public wireless access points limited.	
Intel Dual Band Wireless-AC 7260	Wireless LAN Standards
802.11 ac (2x2) WiFi + BT 4.0 combo Adapter*	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ac
	Interoperability
	Wi-Fi certified
	Frequency Band
	802.11b/g/n



Technical Specifications

	<ul style="list-style-type: none"> 2.402 – 2.482 GHz
	802.11a/n
	<ul style="list-style-type: none"> 4.9 – 4.95 GHz (Japan) 5.15 – 5.25 GHz 5.25 – 5.35 GHz 5.47 – 5.725 GHz 5.825 – 5.850 GHz 2.402 – 2.482 GHz
Data Rates	<ul style="list-style-type: none"> 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz) 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)
Modulation	Direct Sequence Spread Spectrum
	BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM
Security¹	<ul style="list-style-type: none"> IEEE and WiFi compliant 64 / 128 bit WEP encryption for a/b/g mode only AES-CCMP: 128 bit in hardware 802.1x authentication WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. WPA2 certification IEEE 802.11i Cisco Certified Extensions, all versions through CCX4 and CCX Lite WAPI
Network Architecture	Ad-hoc (Peer to Peer)
Models	Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power²	<ul style="list-style-type: none"> 2.4G: +13.5dBm minimum 5G: +12dBm minimum Maximum output power must be able to achieve modular regulatory certification with notebooks that have antennas >20cm from the user and peak gain of +3dBi at 2.4GHz and +4dBi at 5GHz
Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Idle mode (PSP): 250 mW (WLAN Associated) Idle mode: 100 mW (WLAN unassociated) Radio disabled: 75 mW
Power Management	ACPI and PCI Express compliant power management
	802.11 compliant power saving mode
Receiver Sensitivity³	802.11b:-95 dBm (1 Mbps), -93 dBm (2 Mbps), -91 dBm (5.5 Mbps), -88 dBm (11 Mbps)



Technical Specifications

	802.11a/g:-90 dBm (6 Mbps), -89 dBm (9 Mbps), -87 dBm (12 Mbps), -85 dBm (18 Mbps), -82 dBm (24 Mbps), -79 dBm (36 Mbps), -76 dBm (48 Mbps), -74 dBm (54 Mbps)	
Antenna type	802.11n:-69 dBm (72.2 Mbps), -66 dBm (300 Mbps) High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO communications and Bluetooth communications	
Form Factor	PCI-Express Half-MiniCard	
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)	
Weight	3.1g	
Operating Voltage	3.3v +/- 9%	
Temperature	Operating	14° to 158° F (-10° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 	
Bluetooth Specification		
	V4.0 High Speed, V2.1+EDR, backwards compatible with V1.1, 1.2 and 2.0	
Number of Available Channels	79 (1 MHz) available channels	
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric	
Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)	
Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate	
Power Consumption	Peak (Tx) 330 mW	
	Peak (Rx) 230 mW	
	Sleep <17 mW	
Antenna	Internally integrated within module	
Range	Up to 33 ft (10 m)	
Electrical Interface	USB 2.0 compliant	
	Microsoft Windows Plug and Play compliant	
Bluetooth Software Supported	Broadcom Bluetooth for Windows	
Link Topology	Microsoft Windows Bluetooth Software	
Security	Point to Point, Multipoint Pico Nets up to 7 slaves	
Power Management	Full support of Bluetooth Security Provisions	
	Microsoft Windows ACPI, and USB Bus Support	



Technical Specifications

Certifications

Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff

All necessary regulatory approvals for supported countries, including:

FCC (47 CFR) Part 15C, Section 15.247 & 15.249

ETS 300 328, ETS 300 826

Low Voltage Directive IEC950

UL, CSA, and CE Mark

Bluetooth Profiles Supported

Generic Access Profile (GAP)

Service Discovery Application Profile (SDAP)

Serial Port Profile (SPP)

Dial_Up Networking Profile (DUN)

Generic Object Exchange Profile (GOEP)

Object Push Profile (OPP)

File Transfer Profile (FTP)

Synchronization Profile (SYNC)

Hard Copy Cable Replacement (HCRP)

Personal Area Networking Profile (PAN)

Human Interface Device Profile (HID)

Generic Audio/Video Distribution Profile (GAVDP)

Advanced Audio/Video Distribution Profile (A2DP)

FAX Profile (FAX)

Basic Imaging Profile (BIP)

Headset Profile (HSP)

Hands Free Profile (HFP)

Basic Printing Profile (BPP)

VDP (Video Distribution Profile)

AVRCP (Audio Video Remote Control Profile)

* Wireless access point and internet service required. Availability of public wireless access points limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices

**Intel Centrino®
Advanced-N 6205
802.11a/b/g/n (2x2)***

Wireless LAN Standards

IEEE 802.11a

IEEE 802.11b

IEEE 802.11g

IEEE 802.11n

Interoperability

Wi-Fi certified

Cisco Compatible Extensions Program compliant with Microsoft Windows 7, Windows Vista and XP (details at:

<http://www.hp.com/go/notebooks/WLAN>)

Frequency Band

2.4 GHz and 5GHz

Antenna Structure

2 transmit; 2 receive (2x2)

Data Rates

802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps

802.11b: 1, 2, 5.5, 11 Mbps

802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps

802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification

Modulation

Direct Sequence Spread Spectrum

DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM



Technical Specifications

Security¹	Authentication: WPA and WPA2, 802.1x (EAP_TLS, TTLS, PEAP, LEAP, EAP-FAST) Authentication Protocols: PAP, CHAP, TLS, GTC, MS-CHAP, MS-CHAPv2 Encryption: 64 and 128-bit WEP, AES-CCMP, CKIP, TKIP Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between 2.4GHz band Access Points
Output Power (for CCK and OFDM) ²	17 dBm max
Power Consumption	Transmit: 2.3 Watts (max, with two spatial streams) Receive: 1 Watt (max with two spatial streams) Idle mode ³ : 35 mW (average) Radio off: 20 mW (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity⁴	54 Mbps: -76 dBm, 6 Mbps: -92 dBm
Antenna Connections	2 U.FL type connectors, 50 ohm nominal impedance
Form Factor	PCI-Express Half-MiniCard
Weight	0.0075 lb (3.4 g)
Dimensions	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)
Operating Voltage	3.3V +/- 9%
Temperature	Operating 32° to 176° F (0° to 80° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 90% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode and on battery power.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

* Wireless access point and internet service required. Availability of public wireless access points limited.



Technical Specifications

Intel Centrino® Advanced-N 6235 802.11a/b/g/n and Bluetooth 4.0 Combo*	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows 7, Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz and 5 GHz
	Data Rates	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
	Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 5) with Microsoft Windows 7, Windows Vista and XP only.
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power²	13.5 dBm , nominal
	Power Consumption	Idle associated: 250 mW Idle unassociated: 100 mW Radio disabled: 75mW Transmit: 2.0 W (max) Receive: 1.6 W (max)
	Power Management	ACPI compliant power management 802.11 compliant power saving mode
	Receiver Sensitivity³	54 Mbps: -71 dBm, 11 Mbps: -85 dBm , 1 Mbps: -95 dBm
	Antenna Connections	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure
	Form Factor	PCI-Express Half-MiniCard 1.2
	Weight	0.013 lb (6 g)
	Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
	Operating Voltage	3.3v +/- 10%
	Temperature	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)



Technical Specifications

Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility⁴	Microsoft Windows XP Choice of Configuration Utility: <ul style="list-style-type: none">○ Microsoft Windows XP Wireless Network Connection Manager○ Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support)	
	Microsoft Windows Vista <ul style="list-style-type: none">○ Microsoft Windows Vista Wireless Network Connection Manager○ Broadcom IHV extensions for Windows Vista available to support Cisco Compatible Extensions.	
	Microsoft Windows 7 <ul style="list-style-type: none">○ Microsoft Windows 7 Wireless Network Connection Manager○ Broadcom IHV extensions for Windows 7 available to support Cisco Compatible Extensions.	
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON	
	<ol style="list-style-type: none">1. Check latest software/driver release for updates on supported security features.2. Maximum output power may vary by country according to local regulations.3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.	
Bluetooth 4.0 Wireless Technology		
Bluetooth Specification	2.1+EDR, 3.0+HS, 4.0 Compliant	
Dimensions	1.18 x 0.26 x 0.13 in (30 x 6.5 x 3.25 mm)	
Frequency Band	2402 to 2480 MHz	
Number of Available Channels	79 (1 MHz) available channels	
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric	
Transmit Power	Max 4 dBm (Bluetooth Class II)	
Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate	
Power Consumption	Average 230mW Sleep <1 mW	
Antenna	Internally integrated within module	
Range	Up 33 ft (10 m)	
Electrical Interface	USB 2.0 compliant	



Technical Specifications

Bluetooth Software Supported	Microsoft Windows Plug and Play compliant Broadcom Bluetooth for Windows Microsoft Windows Bluetooth Software	
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves	
Security	Full support of Bluetooth Security Provisions	
Power Management	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff	
Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark	
Temperature	Operating	-4° to 158° F (-20° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90%
	Non-operating	5% to 95%
Altitude	Operating	15,000 ft (4,572 m)
	Non-operating	40,000 ft (12,192 m)
Bluetooth Profiles Supported	Serial Port Profile (SPP) ¹ Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) ^{1,2} Generic Object Exchange Profile (GOEP) ^{1,2} Object Push Profile (OPP) ^{1,2} File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) ^{1,2} Personal Area Networking Profile (PAN) ^{1,2} Human Interface Device Profile (HID) ^{1,2,3} FAX Profile (FAX) Basic Imaging Profile (BIP) ² Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)	

1. indicates the profile is supported by Microsoft Windows XP SP2

2. indicates the profile is part of Windows Vista

* Wireless access point and internet service required. Availability of public wireless access points limited.

AUDIO/MULTIMEDIA - DTS SOUND+

Hardware	Implementation	IDT 92HD91
-----------------	-----------------------	------------



Technical Specifications

Audio Output Quality	Function Key Volume Controls	Volume up, volume down, and mute
	Full Duplex	Yes
	Microphone In	Stereo
	Headphone/Line Out	Stereo
	Integrated Microphone	Yes, dual digital microphone array when equipped with optional webcam
	Frequency Response	20 Hz – 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	–110 dB
	Play/Record Sampling Rate(s)	8 kHz – 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit
Integrated Stereo Speakers	Power Rating	2 Watts
	Impedance	4 Ohms

POWER

HP 90W Smart AC Adapter (discrete or UMA configurations)	Dimensions	5.00 x 1.97 x 1.1 in (12.7 x 5.0 x 2.9 cm)
	Weight	0.82 lb (370 g)
	Input	100 to 240 VAC
	Input Efficiency	87% min at 115/230 VAC
	Input frequency range	47 to 63 Hz
	Input AC current	1.5 A at 90 VAC, 0.75 A at 180 VAC PFC Version 2.4 A at 90 VAC, 1.2 A at 180 VAC NON PFC Version
	Output	
	Output power	90W
	DC output	19.0V
	Hold-up time	5 msec at 115 VAC input
	Output current limit	<11A, Over voltage protection- 29V max automatic shutdown
Connector	Connector	3 pin/grounded, mates with interchangeable cords
	Environmental Design	Operating temperature
		32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature
		–4° to 149° F (–20° to 65° C)
		Altitude
		0 to 10,000 ft (0 to 3,048 m)
		Humidity
		20% to 80%
		Storage Humidity
		10% to 90%



Technical Specifications

HP 65W Smart AC Adapter (UMA configurations)	EMI and Safety Certifications	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF- over 200,000 hours at 25°C ambient condition.	
	Dimensions	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)	
	Weight	0.62 lb (280 g)	
	Input	100 to 240 VAC	
	Output	Input Efficiency	87% min at 115/230 VAC
		Input frequency range	47 to 63 Hz
		Input AC current	1.7 A at 90 VAC, 0.85 A at 180 VAC
		Output power	65W
		DC output	18.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown
	Connector	3 pin/grounded, mates with interchangeable cords	
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)
	EMI and Safety Certifications	Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	20% to 80%
		Storage Humidity	10% to 90%
		CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF - over 200,000 hours at 25°C ambient condition.	
	HP 9-cell (100 WHr) Lithium-Ion Primary battery	Dimensions (H x W x L)	0.8 x 2.4 x 8.1 in (2 x 6.6 x 20.5cm)
		Weight (max)	1.1lb, (.488kg)
		Cells/Type	Lithium-Ion
		Energy	Voltage 11.25V
			Amp-hour capacity 8.85Ah
			Watt-hour capacity 100Wh
		Temperature	Operating (Charging) 32° to 113° F (0° to 45° C)
	Battery Re-Charge Time		Operating (Discharging) 14° to 122° F (-10° to 50° C)
			Non-operating -4° to 122° F (-20° to 50° C)
		System in OFF or Standby Mode	3.5 to 5 hours
		System ON	4 to 7 hours
		Fuel Gauge LED	No
		Warranty	1 year



Technical Specifications

HP 6-cell (55 WHr) Lithium-Ion Primary battery	Compatible with optional Travel Battery	Yes
	Dimensions (H x W x L)	0.8 x 1.8 x 8.0in (2.0 x 4.7 x 20.5cm)
	Weight (max)	.70lb, (.313kg)
	Cells/Type	Lithium-Ion
	Energy	Voltage 10.8V
		Amp-hour capacity 5.1Ah
		Watt-hour capacity 55Wh
	Temperature	Operating (Charging) 32° to 113° F (0° to 45° C)
		Operating (Discharging) 14° to 122° F (-10° to 50° C)
		Non-operating -4° to 122° F (-20° to 50° C)
	Battery Re-Charge Time	System in OFF or Standby Mode 2.5 hours
		System ON 3 to 5 hours
	Fuel Gauge LED	No
HP 6-cell (55 WHr) Long Life Primary Battery	Warranty	1 year
	Compatible with optional Travel Battery	Yes
	Dimensions (H x W x L)	0.8 x 1.8 x 8.0in (2.0 x 4.7 x 20.5cm)
	Weight (max)	.72lb, (.323kg)
	Cells/Type	Lithium-Ion
	Energy	Voltage 10.8V
		Amp-hour capacity 5.1Ah
		Watt-hour capacity 55Wh
	Temperature	Operating (Charging) 32° to 113° F (0° to 45° C)
		Operating (Discharging) 14° to 122° F (-10° to 50° C)
		Non-operating -4° to 122° F (-20° to 50° C)
	Battery Re-Charge Time	System in OFF or Standby Mode 2.5 hours
		System ON 3 to 5 hours
	Fuel Gauge LED	No
	Warranty	3 years*
	Compatible with optional Travel Battery	Yes
HP 3-cell (31 WHr) Lithium-Ion Primary battery	Dimensions (H x W x L)	0.8 x 1.8 x 8.0in (2.0 x 4.7 x 20.5cm)
	Weight (max)	0.47lb, (.210kg)
	Cells/Type	Lithium-Ion
	Energy	Voltage 11.1V
		Amp-hour capacity 2.8Ah
		Watt-hour capacity 31Wh

* 3-year platform warranty is required for a 3-year Long Life Battery warranty.



Technical Specifications

Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
	Operating (Discharging)	14° to 122° F (-10° to 50° C)
	Non-operating	-4° to 122° F (-20° to 50° C)
Battery Re-Charge Time	System in OFF or Standby Mode	2.5 hours
	System ON	3 to 5 hours
Fuel Gauge LED	No	
Warranty	1 year	
Compatible with optional Travel Battery	Yes	

ENVIRONMENTAL

Environmental Data

Eco-Label Certifications & Declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- EPEAT <Gold> registered in the United States. See <http://www.epeat.net> for registration status in your country.

HP ProBook 640 G1 Notebook PC

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a "Typically Configured Notebook".

Energy Consumption (in accordance with US ENERGY STAR® test method)

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	8.97 W	9.45 W	9.03 W
Normal Operation (Long idle)	6.57 W	6.45 W	5.57 W
Sleep	0.75 W	0.73 W	0.76 W
Off	0.36 W	0.36 W	0.36 W

NOTE:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then



Technical Specifications

energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	31 BTU/hr	32 BTU/hr	31 BTU/hr
Normal Operation (Long idle)	22 BTU/hr	22 BTU/hr	19 BTU/hr
Sleep	3 BTU/hr	2 BTU/hr	3 BTU/hr
Off	1 BTU/hr	1 BTU/hr	1 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Typically Configured - Idle	3.4	27
Fixed Disk - Random writes	3.4	27

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

Mercury greater than 1ppm by weight

Cadmium greater than 20ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the <gold> level, see www.epeat.net
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 5% post-consumer recycled plastic (by wt.)
- This product is 97.3% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
 - PAPER/Corrugated 482.6 g
- Internal:
 - PLASTIC/EPE (Expanded Polyethylene) 28 g
 - PLASTIC/Polyethylene low density 30.4 g



Technical Specifications

- The PAPER/Corrugated packaging material is made from 70 % recycled content.
- The PLASTIC/EPE (Expanded Polyethylene) packaging materials contains at least 50% recycled content.
- The PLASTIC/Polyethylene low density packaging materials contains at least 50% recycled content.

HP ProBook 650 G1 Notebook PC

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a "Typically Configured Notebook".

Energy Consumption (in accordance with US ENERGY STAR® test method)

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	11.96 W	12.35 W	11.14 W
Normal Operation (Long idle)	7.35 W	7.9 W	7.49 W
Sleep	0.61 W	0.74 W	0.62 W
Off	0.46 W	0.46 W	0.45 W

NOTE:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Heat Dissipation*	115VAC, 60Hz	230VAC, 50Hz	100VAC, 60Hz
Normal Operation (Short idle)	41 BTU/hr	42 BTU/hr	38 BTU/hr
Normal Operation (Long idle)	25 BTU/hr	27 BTU/hr	26 BTU/hr
Sleep	2 BTU/hr	3 BTU/hr	2 BTU/hr
Off	2 BTU/hr	2 BTU/hr	2 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Typically Configured - Idle	3.6	29
Fixed Disk - Random writes	3.7	30



Technical Specifications

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

Mercury greater than 1ppm by weight

Cadmium greater than 20ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the <gold> level, see www.epeat.net
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 5% post-consumer recycled plastic (by wt.)
- This product is 97.3% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
 - PAPER/Corrugated 482.6 g
- Internal:
 - PLASTIC/EPE (Expanded Polyethylene) 28 g
 - PLASTIC/Polyethylene low density 30.4 g
- The PAPER/Corrugated packaging material is made from 70 % recycled content.
- The PLASTIC/EPE (Expanded Polyethylene) packaging materials contains at least 50% recycled content.
- The PLASTIC/Polyethylene low density packaging materials contains at least 50% recycled content.

ALL MODELS

MATERIAL USAGE

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at: <http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins



Technical Specifications

- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBT0)

PACKAGING USAGE

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

END-OF-LIFE MANAGEMENT AND RECYCLING

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.



Technical Specifications

HEWLETT-PACKARD CORPORATE ENVIRONMENTAL INFORMATION

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_Certificate.pdf

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

COUNTRY OF ORIGIN

TBD



Options and Accessories (sold separately and availability may vary by country)

Type	Description	Part #
Cases	HP Professional Series Carrying Case (up to 15.6")	H4J90AA
	HP Professional Slim Top Load Case (up to 17.3")	H4J91AA
	HP Essential Top Load Case (up to 15.6")	H2W17AA#xxx
	HP Business Nylon Case	H5M92AA
	HP Business Backpack (up to 17.3")	H5M90AA
	HP Business 4 Wheel Roller Case	H5M93AA
Docking	HP Adjustable Dual Monitor Stand	AW664AA#xxx
	HP Adjustable Display Stand	AW663AA#xxx
	HP Display and Notebook Stand	AW662AA#xxx
	HP 90W Docking Station	A7E32AA#xxx
	HP 120W Advd Docking Station	A7E36AA#xxx
	HP 2012 230W Docking Station	A7E34AA
Input/Output	HP 2012 230W Advanced Docking Station	A7E38AA
	HP Comfort Grip Wireless Mouse	H2L63AA
	HP 3-Button USB Laser Mouse	H4B81AA
Adapters	HP USB Optical Travel mouse	RH304AA
	HP 65W Slim Adapter	AX727AA#XXX
	90W Smart AC Adapter	ED495AA#xxx
	90W Slim Adapter	BT796AA#xxx
	HP 65W Smart AC Adapter	H6Y89AA
	HP 90W Smart AC Adapter	H6Y90AA
	HP 65W Slim AC Adapter	H6Y82AA
	HP 90W Slim AC Adapter	H6Y83AA
Batteries	HP CA06XL Notebook Battery 6-cell 55 WHr	TBD
	HP CA09 Notebook Battery 9-cell 100 WHr	TBD
Security	HP Docking Station Cable Lock	AU656AA#XXX
	HP Notebook Combo Lock	AY475AA#XXX
	HP UltraSlim Keyed Cable Lock	H4D73AA
Storage - External Storage	HP Mobile USB DVDRW	A2U57AA
Health and Education	HP 20-Notebook Managed Charging Cart	QL489AA#xxx
	HP 30-Notebook Managed Charging Cart	QL490AA



Options and Accessories (sold separately and availability may vary by country)

Copyright © 2014 Hewlett-Packard Development Company, L.P.

All rights reserved. Intel, Core, and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark owned by its proprietor and used by Hewlett-Packard Company under license. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. Adobe is a trademark of Adobe Systems Incorporated. ENERGY STAR is a registered mark owned by the U.S. government.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.



Summary of Changes

Date of change:	Version History:		Description of change:
June 11, 2014	From vMay'14 to vJun'14	Changed	15.6" FHD Panel, 3 cell battery specs, change log.
July 7, 2014	From v3 to v4	Changed	Changed weight specs
July 11, 2014	From v4 to v5	Removed	Lync Optimized
July 22, 2014	From v5 to v6	Changed	Added 230 VAC to input efficiency specs, deleted Trust Circles references
July 31, 2014	From v6 to v7	Added	Windows 8.1 Pro
August 8, 2014	From v7 to v8	Added	Web-only Support OS list
August 28, 2014	From v8 to v9	Added	Details for the 180 GB SSD
September 24, 2014	From v9 to v10	Changed	Processor details: updated processors, added chipset details
October 13, 2014	From v10 to v11	Added	Line art on page 7
October 28, 2014	From v11 to v12	Removed	Windows 7 versions
November 26, 2014	From v12 to v13	Added	New dockings on page 58
November 27, 2014	From v13 to v14	Updated	Communications page 14 and specs pages 28 and 29
December 1, 2014	From v14 to v15	Updated	Overview with military testing and Flash Cache
December 9, 2014	From v15 to v16	Added	Footnote on page 8 for Military Testing
January 5, 2015	From v16 to v17	Updated	Cores in i7-4610M processor
February 19, 2015	From v17 to v18	Updated	Backlit statement on page 3, 15

